

CITY OF LOS ALAMITOS
Council Chamber
3191 Katella Ave., Los Alamitos CA 90720

TRAFFIC COMMISSION AGENDA
REGULAR MEETING

Wednesday, July 10, 2024 – 7:00 PM

NOTICE TO THE PUBLIC - This Agenda contains a brief general description of each item to be considered. Except as provided by law, action or discussion shall not be taken on any item not appearing on the agenda. Supporting documents, including staff reports, are available for review at City Hall in the City Clerk's Office or on the City's website at www.cityoflosalamitos.org once the agenda has been publicly posted.

Each matter on the agenda, no matter how described, shall be deemed to include any appropriate motion, whether to adopt a minute motion, resolution, payment of any bill, approval of any matter or action, or any other action. Items listed as "for information" or "for discussion" may also be the subject of an "action" taken by the City Council at the same meeting.

Agenda-related documents provided to a majority of the City Council after distribution of the Traffic Commission agenda packet (GC §54957.5) will be made available for public inspection at the meeting. Such documents will also be available at the City Clerk's office, 3191 Katella Avenue Los Alamitos, CA 90720.

In compliance with the Americans with Disabilities Act, Assistive Listening headphones are available and can be checked out from the City Clerk. If you need special assistance to participate in this meeting, please contact the City Clerk at (562) 431-3538, ext. 220. Notification at least 42 hours prior to the meeting will enable the City to make reasonable arrangements to ensure accessibility to this meeting. [28 CFR 35.102.35 ADA Title II]. Language translation services are available for this meeting by calling the City Clerk's Office at least 42 hours in advance.

If you are unable to attend this meeting in person, you may submit comments on any agenda item or on any item not on the agenda by email to cityclerk@cityoflosalamitos.org with the subject line "TRAFFIC COMMISSION PUBLIC COMMENT". Comments received by 3:00 p.m. the day of the meeting will be compiled, provided to the City Council, and made available to the public before the start of the meeting. Staff will not read email comments at the meeting. You may also view the meeting live on local cable channel 3.

If, as an attendee, or a participant at this meeting, you will need special assistance beyond what is normally provided, please contact the City Clerk's Office at (562) 431-3538, extension 220, 48-hours prior to the meeting so that reasonable arrangements may be made.

1. CALL TO ORDER

2. ROLL CALL

Chair Murphy
Vice Chair Mejia
Commissioner D. Hill
Commissioner R. Hill
Commissioner Marchese
Commissioner Patz
Commissioner Rojas

3. PLEDGE OF ALLEGIANCE

4. ORAL COMMUNICATIONS

At this time, any individual in the audience may address the Traffic Commission and speak on any item within the subject matter jurisdiction of the Commission. Please state if you wish to speak on an item on the Agenda. **Remarks are to be limited to not more than three minutes.**

5. CONSENT CALENDAR

All Consent Calendar items may be acted upon by one motion unless a Traffic Commissioner requests separate action on a specific item.

A. Approval of Minutes

Approve the Minutes for the Regular Meeting of June 12, 2024.

6. STAFF REPORTS

A. Update on Street Improvements on Various Streets FY 2023-2024 Project (CIP No. 23/24-03) (Development Services)

The upcoming City street rehabilitation project entitled, "Street Improvements on Various Streets FY 2023-2024 Project (CIP No. 23/24-03)", will take place citywide on various residential streets. As part of the City's ongoing pavement management plan, streets are maintained by methods such as grind and overlay and slurry seal. The program is a vital resource for the City to enhance road and vehicular safety, ensure longevity of roadways, and provide for ADA access to current standards. This report and presentation will outline and update the Commission on the specific locations of the project and projected timeline for completion.

Recommendation:

Receive and file.

B. Traffic Commission Status Log (Development Services)

Recommendation:

Receive, File and Revise as Necessary

7. ITEMS FROM THE DEVELOPMENT SERVICES DEPARTMENT

8. TRAFFIC COMMISSION INITIATED BUSINESS

At this time, Commissioners may report on items not included on the agenda, but no such matter may be discussed, nor may any action be taken in which there is interest to the community, except as to provide Staff direction to report back or to place the item on a future agenda.

9. ADJOURNMENT

I hereby certify under penalty of perjury under the laws of the State of California, that the foregoing Agenda was posted at the Los Alamitos City Hall, 3191 Katella Ave. and online at www.cityoflosalamitos.org not less than 72 hours prior to the meeting.



Vandine Ouk
Department Secretary
Dated: 07/03/2024

MINUTES OF TRAFFIC COMMISSION MEETING OF THE CITY OF LOS ALAMITOS

REGULAR MEETING – June 12, 2024

1. CALL TO ORDER

The Traffic Commission met in Regular Session at 7:00 p.m. on Wednesday, June 12, 2024, Chair Murphy presiding.

2. ROLL CALL

Present: Commissioners: Chair Murphy,
Vice Chair Mejia
D. Hill (absent), R. Hill, Marchese, Patz, and
Rojas

Present: Staff: Irving Montenegro Jr., Development Services
Manager
Chris Kelley, City Engineer
Elizabeth Cortez, Photo Enforcement Officer
Vandine Ouk, Department Secretary

3. PLEDGE OF ALLEGIANCE

Commissioner Patz led the Pledge of Allegiance.

4. ORAL COMMUNICATION

Chair Murphy opened oral communications.

Chair Murphy closed oral communications.

5. CONSENT CALENDAR

All Consent Calendar items may be acted upon by one motion unless a Traffic Commissioner requests separate action on a specific item.

A. Approval of the Minutes

Approval of the Minutes for the Regular Meeting of April 10, 2024.

Motion/Second: Patz/Mejia

Carried 6/0 (D. Hill absent): The Traffic Commission approved the Regular Meeting Minutes of April 10, 2024.

6. STAFF REPORTS

A. Red Light Photo Enforcement Program

Development Services Manager Montenegro Jr. summarized the staff report.

Photo Enforcement Officer Cortez presented a PowerPoint presentation on the Red Light Photo Enforcement Program.

The Traffic Commission asked and received clarification from Photo Enforcement Officer Cortez on the following:

- Cameras are synchronized to the traffic signals and will not go off if the light is green.
- Katella Avenue at Bloomfield Street is monitored at all four directions.
- The City has won all appeal cases presented in court.
- Cameras only turn-on upon sensors triggered by red light (not amber or green).
- Photo Enforcement Officers only have access to show who the vehicle is registered to and not if they have warrants or criminal activity.
- Running the red light is considered a moving violation and a point would be added to their driving record.
- Videos of vehicles triggering the camera by crossing the limit line will be under review to determine if there was a violation.
- Baseline for a violation starts at \$100.00.
- Every city is able to adjust their amber light times.
- Los Alamitos and Garden Grove are the only cities in Orange County with Red Light Cameras.
- If the driver of a vehicle is not the registered owner, a courtesy notice is issued with a transfer of liability form for the owner to complete stating who was driving at the time of the violation.
- The contractor, Red Flex, paid for the installation of the new infrastructures.
- The old red light cameras are still running well and do not have any plans for update anytime soon.

B. Traffic Commission Status Log

This is a traffic tool used by the Traffic Commission to track assignments and accomplishments.

The Traffic Commission reviewed the status log and no additions or changes were made.

6. FROM THE DEVELOPMENT SERVICES DEPARTMENT

Development Services Manager Montenegro Jr. discussed the following:

- Summer Concerts – Thursdays 6:30 p.m. – 8:30 p.m. on Pine Street then at various parks

- Parklet Series Shoutout to Economic Development Supervisor Elisha Boothe
- Nights on Pine – Saturdays
- 3rd of July Event – Gates open at 4:00 p.m.

Commissioner Rojas asked and received clarification Development Services Manager Montenegro Jr. that entry for the 3rd of July event is by vehicle only.

City Engineer Kelley discussed the following:

- Los Alamitos Boulevard Striping Project will be awarded at the June's City Council Meeting
- Los Angeles Sanitation Project will be a ten-week project
- Upcoming encroachment by Southern California Edison for replacement of an existing vault
- Measure Y Citywide Street Project will go out to bid on June 26th

Vice Chair Mejia asked and received clarification from City Engineer Kelley that the Los Alamitos Striping Project will be awarded in June.

Chair Murphy asked and received clarification from City Engineer Kelley that the bike lanes and restriping of existing lanes will be included in the Los Alamitos Boulevard Striping Project.

Chair Murphy asked and received clarification from Development Services Manager Montenegro Jr. that the trench created in front of City Hall I is due to the emergency repair of the gas leak.

8. TRAFFIC COMMISSION INITIATED BUSINESS

Vice Chair Mejia inquired about the following:

- Request for Southern California Edison Representative attendance
- Neighborhood Sign Survey
- City Ordinance review for parking permits
- Reviewing the parking restriction time limits we have around the city
- New bollards on Pine Street

Development Services Manager Montenegro Jr. stated the Neighborhood Sign Survey will launch on June 17, 2024. The survey will be available for about forty-five days to allow residents to participate in possible renaming of Apartment Row and their respective neighborhood's monument sign.

Development Services Manager Montenegro Jr. stated that the Neighborhood Parking and Street Sweeping Survey was conducted to initiate a revisit of the city ordinance on parking permits.

Commissioner Patz motioned to add one way street with angled parking in Apartment Row on Green Avenue and Howard Avenue to the next meeting's agenda.

Commissioner Marchese asked and received clarification from Development Services Manager Montenegro Jr. that the residents who are in proximity of the striping project on the west of Lexington Drive will be noticed at least thirty days before construction.

Chair Murphy asked and received clarification from City Engineer Kelley that the Lexington Striping Project has not been awarded by City Council yet.

Chair Murphy requested to have a discussion on the Lexington Striping Project.

Commissioner R. Hill requested Traffic Commission to review 2-hour parking sign in front of 10841 Bloomfield Street. Business owner Leone Electric Inc. would like to remove the 2-hour sign to reserve parking for staff.

City Engineer Kelley briefly discussed the Bloomfield Active Transportation Program (ATP) Project.

Commissioner R. Hill motioned to review time limit parking signs in the city at an upcoming meeting.

Commissioner R. Hill requested to add a "No U-Turn" sign on the left turn lane on Los Alamitos Boulevard into Good Shepherd Church.

Chair Murphy asked and received clarification from Development Services Manager Montenegro Jr. that the City is currently in review of the Residential Parking and Street Sweeping Survey to determine if the schedules will change.

Chair Murphy asked and received clarification from Development Services Manager Montenegro Jr. that the California Daylighting Law will not be implemented until next year, but the plan is to evaluate the law and educate the residents.

City Engineer Kelley stated that Traffic Engineer Iranitalab is currently in discussion with other cities about the California Daylighting Law.

Chair Murphy motioned to discuss and create an e-bike plan for the City at the next Traffic Commission Meeting.

City Engineer Kelley stated the City is waiting for the county to establish the e-bike laws.

9. ADJOURNMENT

Motion/Second: Patz/Murphy

Carried 6/0 (D. Hill absent): The Traffic Commission unanimously voted to adjourn the meeting until July 10, 2024.

The Traffic Commission adjourned at 8:09 p.m.

Bruce Murphy, Chair

Attest:

Vandine Ouk, Department Secretary

City of Los Alamitos

TRAFFIC COMMISSION AGENDA REPORT

MEETING DATE: July 10, 2024

ITEM NUMBER: 6A

To: Chair Murphy & Members of the Traffic Commission

Presented By: Irving Montenegro Jr., Manager

**Subject: Update on Street Improvements on Various Streets FY 2023-2024
Project (CIP No. 23/24-03)**

SUMMARY

The upcoming City street rehabilitation project entitled, "Street Improvements on Various Streets FY 2023-2024 Project (CIP No. 23/24-03)", will take place citywide on various residential streets. As part of the City's ongoing pavement management plan, streets are maintained by methods such as grind and overlay and slurry seal. The program is a vital resource for the City to enhance road and vehicular safety, ensure longevity of roadways, and provide for ADA access to current standards. This report and presentation will outline and update the Commission on the specific locations of the project and projected timeline for completion.

RECOMMENDATION

Receive and file.

BACKGROUND

The City of Los Alamitos proposes to grind and overlay and slurry seal various residential streets throughout the City as part of the City's ongoing pavement management program. The project will also replace damaged curb & gutter and lifted sidewalk to correct drainage. ADA curb ramps will be modified to current codes as necessary for accessibility. The project will improve the following streets:

- Kyle Street (South of Kinmount Street)
- Kaylor Avenue (Ball Road to Kinmount Street)
- Maple Street (South of Kinmount Street)
- Kinmount Street
- Farnham Avenue
- Catalina Street (Oak Street to Los Alamitos Boulevard)
- Catalina Street (Cherry Street to Kyle Street)
- Noel Street (North of Katella Avenue)
- Glacier Circle
- Vicksburg Circle
- Carlsbad Circle
- Interior Circle
- Ranier Circle

- Apollo Circle
- Saratoga Drive
- Langley Drive
- Essex Drive
- Enterprise Drive
- Midway Drive
- Ticonderoga Drive
- Ranger Drive
- Tarawa Drive
- Bunker Hill Drive
- Green Ave (Saratoga to Ticonderoga)
- Howard Avenue (Lexington to Bennington)

DISCUSSION

The following is an approximate timeline for the completion of the Street Improvements on Various Streets FY 2023-2024 Project (CIP No. 23/24-03):

- | | |
|--------------|--|
| • 07/24/2024 | Bid opening |
| • 08/19/2024 | Award of Contract (City Council Meeting) |
| • 09/24/2024 | Start of construction |
| • 12/20/2024 | End of construction |

The City of Los Alamitos will continue to seek out funding opportunities to pave and rehabilitate its roadway systems. The City is currently designing arterial plans to improve various streets such as Katella Avenue, Downtown Pine Street and Cerritos Avenue.

FISCAL IMPACT

Funding for this project is included in the 2023-2024 Measure Y Fund and the 2023-2024 adopted budget for SB-1. Totals are shown below:

Available funding for the projects is provided as follows:

Source	Amount
SB-1	\$660,000.00
Measure Y Fund	\$1,000,000.00
Project Total	\$1,660,000.00

Attachment: 1. LOS ALAMITOS MEASURE Y PLANS_2024.06.18

UTILITY CONTACTS:

CENCO REFINING CO. (562) 944-6111
ORANGE COUNTY SANITATION DIST. (714) 962-2411
PACIFIC BELL (714) 666-5716
ROOSMOOR/LOS ALAMITOS SEWER DIST. (562) 431-2223
SOUTHERN CALIFORNIA EDISON CO. (562) 981-8205
SOUTHERN CALIFORNIA GAS CO. (714) 634-3133
GOLDEN STATE WATER COMPANY (562) 907-9200
TIME-WARNER COMMUNICATION (714) 895-6886
UNDERGROUND SERVICE ALERT (800) 422-4133
VERIZON (704) 375-6719

ABBREVIATIONS

AB	AGGREGATE BASE	MSE	MECHANICALLY STABILIZED EARTH
AC	ASPHALT CONCRETE	NIC	NOT IN CONTRACT
ANG	ANGLE	NTS	NOT TO SCALE
AP	ANGLE POINT	NW	NORTHWEST
ARHM	ASPHALT RUBBER HOT MIX	O.C.	ON CENTER, OWNERS CONDUIT
ASPH	ASPHALT	OG	ORIGINAL GROUND
BEG	BEGIN	PB	PULL BOX
BW	BACK OF WALK	PCC	PORTLAND CEMENT CONCRETE/
CAB	CRUSHED AGGREGATE BASE		POINT OF COMPOUND CURVATURE
CB	CATCH BASIN	P/L	PROPERTY LINE
C/L	CENTER LINE	PROP	PROPOSED
C&G	CURB & GUTTER	PVI	POINT OF VERTICAL INFLECTION
CLR	CLEAR	RW	RECLAIMED WATER
CONST	CONSTRUCT	S	SANITARY SEWER
D/W	DRIVEWAY	SCE	SOUTHERN CALIFORNIA EDISON
ESMT	EASEMENT	SE	SOUTHEAST
EP	EDGE OF PAVEMENT	SF	SQUARE FOOT
EL	ELEVATION	SD	STORM DRAIN
EX\EXIST	EXISTING	SMH	SEWER MANHOLE
FF	FINISHED FLOOR	STA	STATION
FO	FIBER OPTIC CABLE	STD	STANDARD
FS	FINISHED SURFACE	SPPWC	STANDARD PLANS FOR
FL	FLOW LINE		PUBLIC WORKS CONSTRUCTION
H	HEIGHT	TBD	TO BE DETERMINED
HMA	HOT MIX ASPHALT	TC	TOP OF CURB
HP	HINGE POINT	TD	TOP OF DITCH
INV	INVERT	TF	TOP OF FOOTING
JPCP	JOINTED PLAIN	TLP	TOP OF LEVELING PAD
	CONCRETE PAVEMENT	TRANS	TRANSITION
L	LENGTH	TW	TOP OF WALL
LF	LINEAR FOOT	TYP	TYPICAL
LOL	LAYOUT LINE	UGU	UNDERGROUND UTILITIES
MAX	MAXIMUM	VAR	VARIES
MBGR	METAL BEAM GUARD RAILING	VLT	VAULT
MIN	MINIMUM	W	WIDTH, WATER
MH	MANHOLE	WV	WATER VALVE

AGENCIES TO BE NOTIFIED:


- CITY ENGINEER
3191 KATELLA AVENUE
LOS ALAMITOS, CA 90720-5600
(562) 431-3538 EXT. 100
- LOS ALAMITOS POLICE
DEPARTMENT
3201 KATELLA AVENUE
LOS ALAMITOS, CA 90720
(562) 431-2255
- ORANGE COUNTY FIRE
DEPARTMENT
3642 GREEN STREET
LOS ALAMITOS, CA 90720
(562) 431-6026
- LOS ALAMITOS POST OFFICE
10650 REAGAN STREET
LOS ALAMITOS, CA 90720
(562) 431-6547
- ROSSMOOR/LOS ALAMITOS
AREA SEWER DISTRICT
3243 KATELLA AVENUE
LOS ALAMITOS, CA 90720-0542
(562) 431-2223
- LOS ALAMITOS UNIFIED SCHOOL
DISTRICT
10293 BLOOMFIELD STREET
LOS ALAMITOS, CA 90720
(562) 799-4700
- OCTA-BUS STOPS
550 SOUTH MAIN STREET
ORANGE, CA 92668
(714) 560-5912
- CITY OF CYPRESS
5275 ORANGE AVENUE
CYPRESS, CA 90630
(714) 229-6700
- CITY OF LONG BEACH
333 WEST OCEAN BOULEVARD
LONG BEACH CA 90802
(562) 570-6383
- ROSSMOOR COMMUNITY
SERVICES DISTRICT(RCSD)
3001 BLUME DRIVE, ROSSMOOR,
CA 90720
(562) 431-0525



CITY OF LOS ALAMITOS
DEVELOPMENT SERVICES DEPARTMENT

STREET IMPROVEMENT
ON VARIOUS STREETS

FY 2022-2023

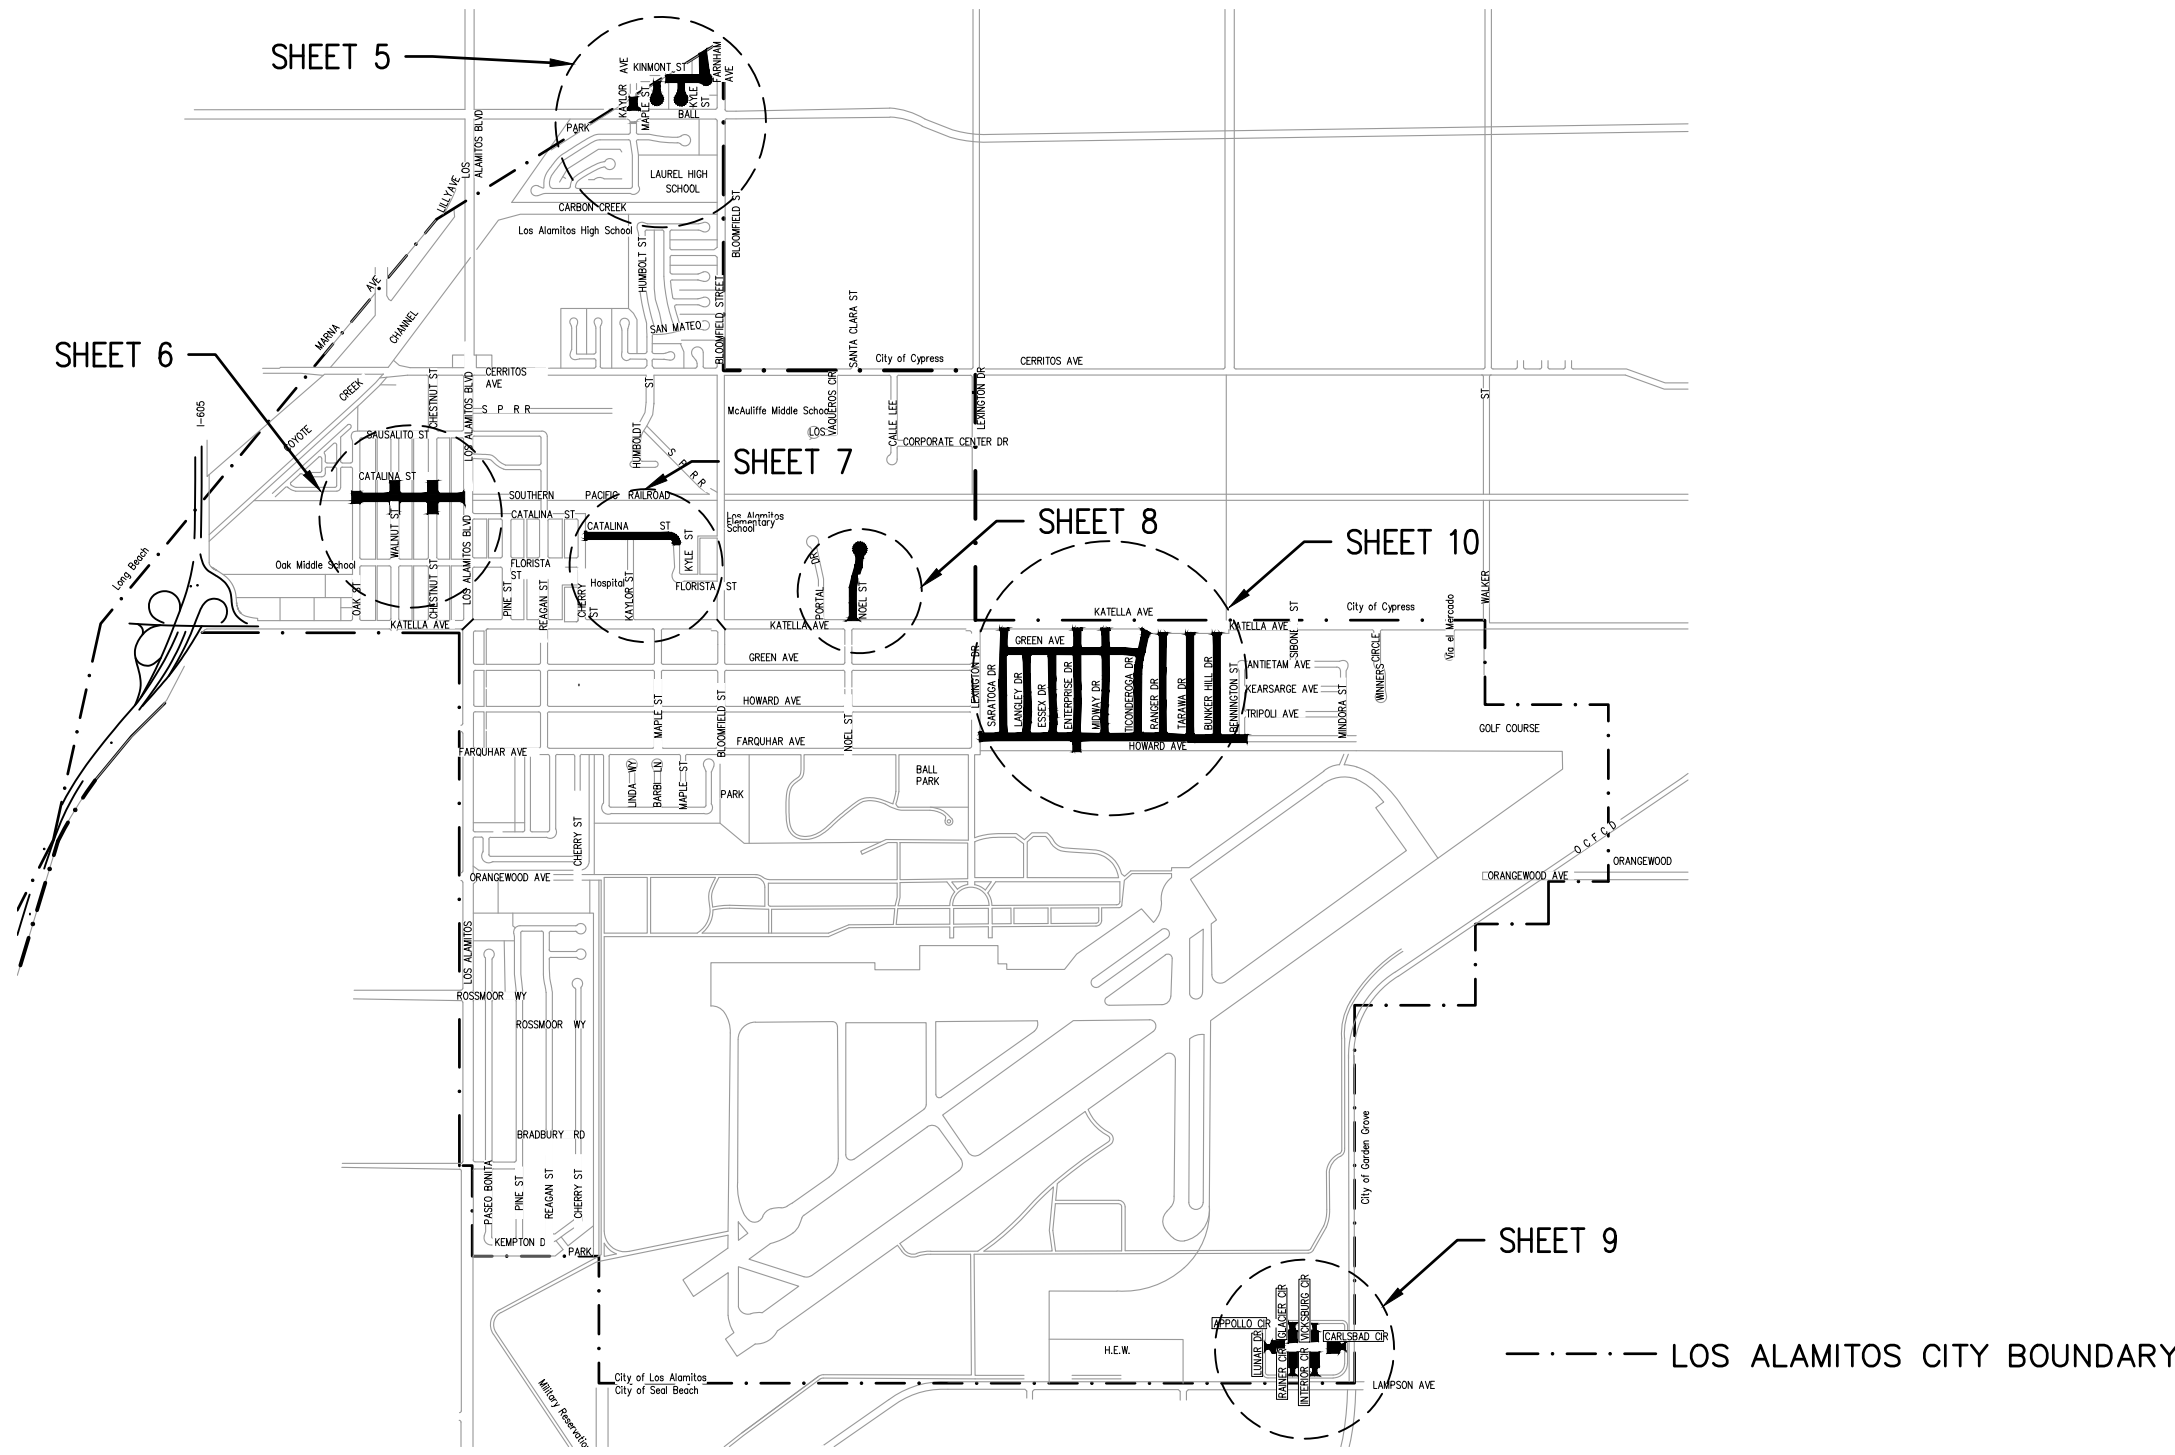

VICINITY MAP

SCALE : NTS

SHEET SCHEDULE	
SHEET NO.	DESCRIPTION
1	TITLE SHEET AND NOTES
2-4	DETAIL SHEETS
5	KINMOUNT STREET, FARNHAM AVENUE, KAYLOR AVENUE, MAPLE STREET, KYLE STREET
6	CATALINA STREET
7	CATALINA STREET
8	NOEL STREET

9	GLACIER CIRCLE, VICKSBURG CIRCLE, CARLSBAD CIRCLE, INTERIOR CIRCLE, RAINIER CIRCLE, APOLLO CIRCLE
10	SLURRY SEAL MAP ON VARIOUS STREETS

GENERAL NOTES:

- ALL WORK SHALL CONFORM TO THE REQUIREMENTS OF THE CITY OF LOS ALAMITOS, STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION, 2021 EDITION, ORANGE COUNTY PF&RD STANDARD PLANS, LATEST EDITION, AS SPECIFIED, AND SPPWC STANDARD PLANS, LATEST EDITION, AS SPECIFIED.
- THE CONSTRUCTION AREA SHALL BE PROPERLY POSTED AND LIGHTED IN CONFORMANCE WITH THE STATE OF CALIFORNIA MANUAL OF TRAFFIC CONTROLS FOR CONSTRUCTION AND WORK ZONES, LATEST EDITION.
- CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS AND SHALL NOTIFY THE CITY ENGINEER, (562) 431-3538, AT LEAST 24 HOURS PRIOR TO ANY REQUIRED INSPECTIONS.
- CONTRACTOR SHALL ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THIS PROJECT, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY, THAT THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS AND THAT THE CONTRACTOR SHALL DEFEND, INDEMNIFY AND HOLD THE CITY AND THE ENGINEER HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED, IN CONNECTION WITH THE PERFORMANCE OF WORK ON THIS PROJECT, EXCEPTING FOR LIABILITY ARISING FROM THE SOLE NEGLIGENCE OF THE CITY OR THE ENGINEER.
- THE EXISTENCE AND LOCATION OF ANY UNDERGROUND UTILITY PIPES OR STRUCTURES SHOWN ON THESE PLANS WERE OBTAINED BY A SEARCH OF THE AVAILABLE RECORDS. TO THE BEST OF OUR KNOWLEDGE THERE ARE NO EXISTING UTILITY LINES EXCEPT AS SHOWN ON THIS PLAN. THE CONTRACTOR IS REQUIRED TO TAKE DUE PRECAUTIONARY MEASURES TO PROTECT THE UTILITY LINES SHOWN AND ANY OTHER LINES NOT OF RECORD OR NOT SHOWN ON THIS PLAN.
- THE CONTRACTOR SHALL MAKE A PHYSICAL INSPECTION OF THE PROJECT SITE AND REPORT ALL VARIATIONS, INCONSISTENCIES, OR CHANGED CONDITIONS TO THE ENGINEER PRIOR TO ANY CONSTRUCTION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY ASSUMPTIONS, REMEDIAL ACTIONS, OR ADAPTATIONS MADE IN THE FIELD WITHOUT THE WRITTEN APPROVAL OF THE ENGINEER.
- REPAIR OR REPLACE ALL DAMAGES OR ALTERATIONS TO EXISTING PUBLIC IMPROVEMENTS TO THE SATISFACTION OF THE CITY ENGINEER AT NO COST TO THE CITY.
- ALL DIMENSIONS SHALL BE VERIFIED BY PLANS OR FIELD INSPECTION. AT NO TIME SHALL ANY DIMENSIONS BE SCALED FROM PLANS. CONTRACTOR SHALL NOTIFY THE ENGINEER OF ALL VARIATIONS IN DIMENSIONS PRIOR TO COMMENCEMENT OF CONSTRUCTION.
- ALL JOINTS AND JOIN LOCATIONS AND UNDERGROUND UTILITY LOCATIONS SHALL BE FIELD VERIFIED.
- AT ALL TIMES, CURB FACE DIMENSIONS AND GUTTER AND SWALE GRADES SHALL BE MAINTAINED, UNLESS OTHERWISE NOTED.
- CONTRACTOR SHALL NOTIFY ALL AFFECTED UTILITY COMPANIES AND AFFECTED AGENCIES AT LEAST 72 HOURS PRIOR TO COMMENCEMENT OF CONSTRUCTION.
- ALL ASPHALT PAVEMENT IMPROVEMENTS INDICATED TO BE REMOVED SHALL BE SAWCUT AT THE LINE OF REMOVAL.

SIGNING AND STRIPING GENERAL NOTES:

- SIGNING STRIPING, AND LOOP REPLACEMENT AND THE INSTALLATION THEREOF SHALL CONFORM TO CALTRANS STANDARD PLANS AND SPECIFICATIONS, LATEST EDITION, THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (CALIFORNIA MUTCD), LATEST EDITION, THIS PLAN AND THE SPECIAL PROVISIONS.
- ALL STRIPING AND MARKINGS SHALL BE INSTALLED AND REMOVED BY THE CONTRACTOR.
- REMOVAL OF ALL CONFLICTING LINES AND MARKINGS SHALL BE BY GRINDING METHOD AND INCLUDES REMOVAL OF RAISED PAVEMENT MARKERS.
- ALL EXISTING STRIPING SHALL BE REMOVED PRIOR TO SLURRY SEAL.
- ALL LANE STRIPING AT INTERSECTION APPROACHES WITHOUT CROSSWALK OR LIMIT LINES SHALL END 10 FEET FROM THE EXTENSION OF THE INTERSECTION CURB LINES.
- ALL STRIPING DETAILS AND PAVEMENT LEGENDS SHALL BE THERMOPLASTIC, UNLESS OTHERWISE NOTED.
- CONTRACTOR SHALL REPAINT ALL EXISTING CURB MARKING THROUGHOUT PROJECT LIMITS. CURB MARKINGS SHALL BE PAINT, TWO (2) COATS. CONTRACTOR SHALL SCRAPE SPALLED AND CHIPPED CURB MARKING PRIOR TO REPAINTING.
- NEW SIGNS SHALL BE HIGH INTENSITY SHEETING WITH GRAFFITI FILM.
- ALL SIGNS ARE EXISTING TO REMAIN, UNLESS OTHERWISE NOTED.
- INSTALL TWO-WAY BLUE REFLECTIVE MARKERS AT EVERY FIRE HYDRANT.
- PERFORM PRELIMINARY STRIPING LAYOUT PRIOR TO POSITIONING LOOP DETECTORS AND OBTAIN APPROVAL FOR EXACT LOOP DETECTOR LOCATIONS PRIOR TO FINAL PLACEMENT. INDUCTIVE DETECTOR LOOPS SHALL BE (6") DIAMETER TYPE "E" AND CENTERED IN THE LANE WITH 10' SPACING IN THE DIRECTION OF TRAVEL. LIMIT LINE LOOPS SHALL BE MODIFIED TYPE "E" BICYCLE DETECTOR LOOPS PER CALTRANS STANDARDS. PLACE LIMIT LINE LOOPS 1 FOOT BEHIND CROSSWALK OR LIMIT LINE.



REVISIONS

NUMBER	DATE	INITIALS	

REFERENCES

APPV'D



DRAWN BY	AM,MT	6/18/2024
CHECKED BY	KS	6/18/2024
DESIGNED BY	AM,MT,YC	6/18/2024
APPROVED	6/18/2024	
City Engineer	Date	


CITY OF LOS ALAMITOS

STREET IMPROVEMENTS ON VARIOUS STREETS FY 2022-2023


TITLE SHEET

SHEET 1 OF 10


USER: YCruz
DATE: Jun 18, 2024 - 3:32pm
FILE: W:\WE-C\los alamitos city of\112154 - los alamitos measure\900-PS&E\901-plans\PL-DET1.dwg

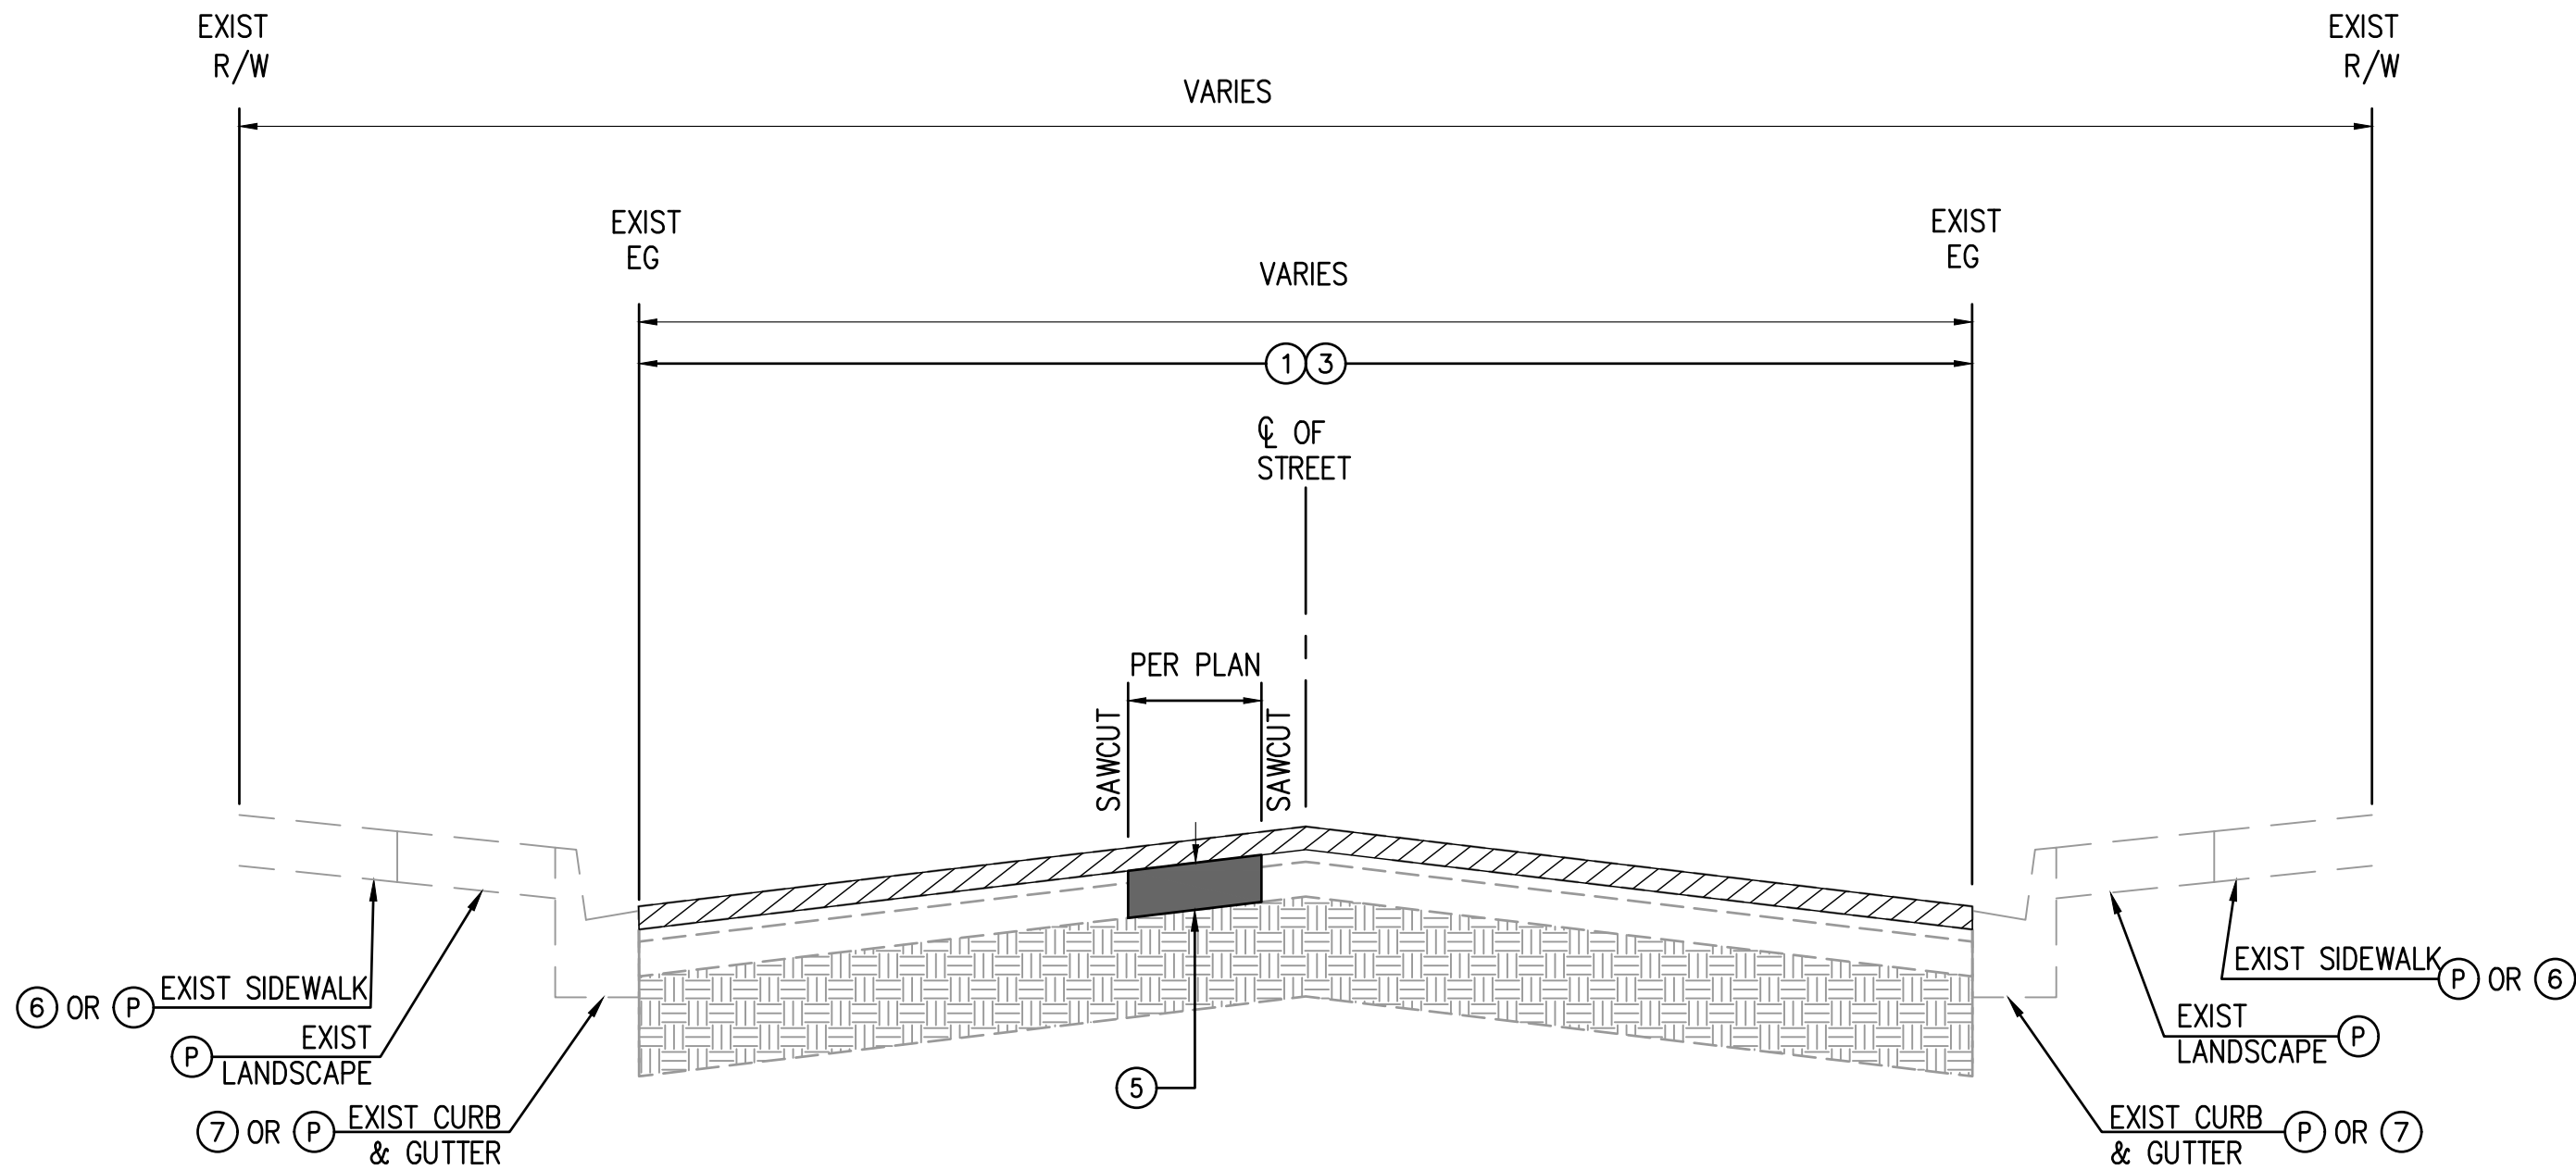


TYPICAL SECTION FOR VARIOUS STREETS
N.T.S.

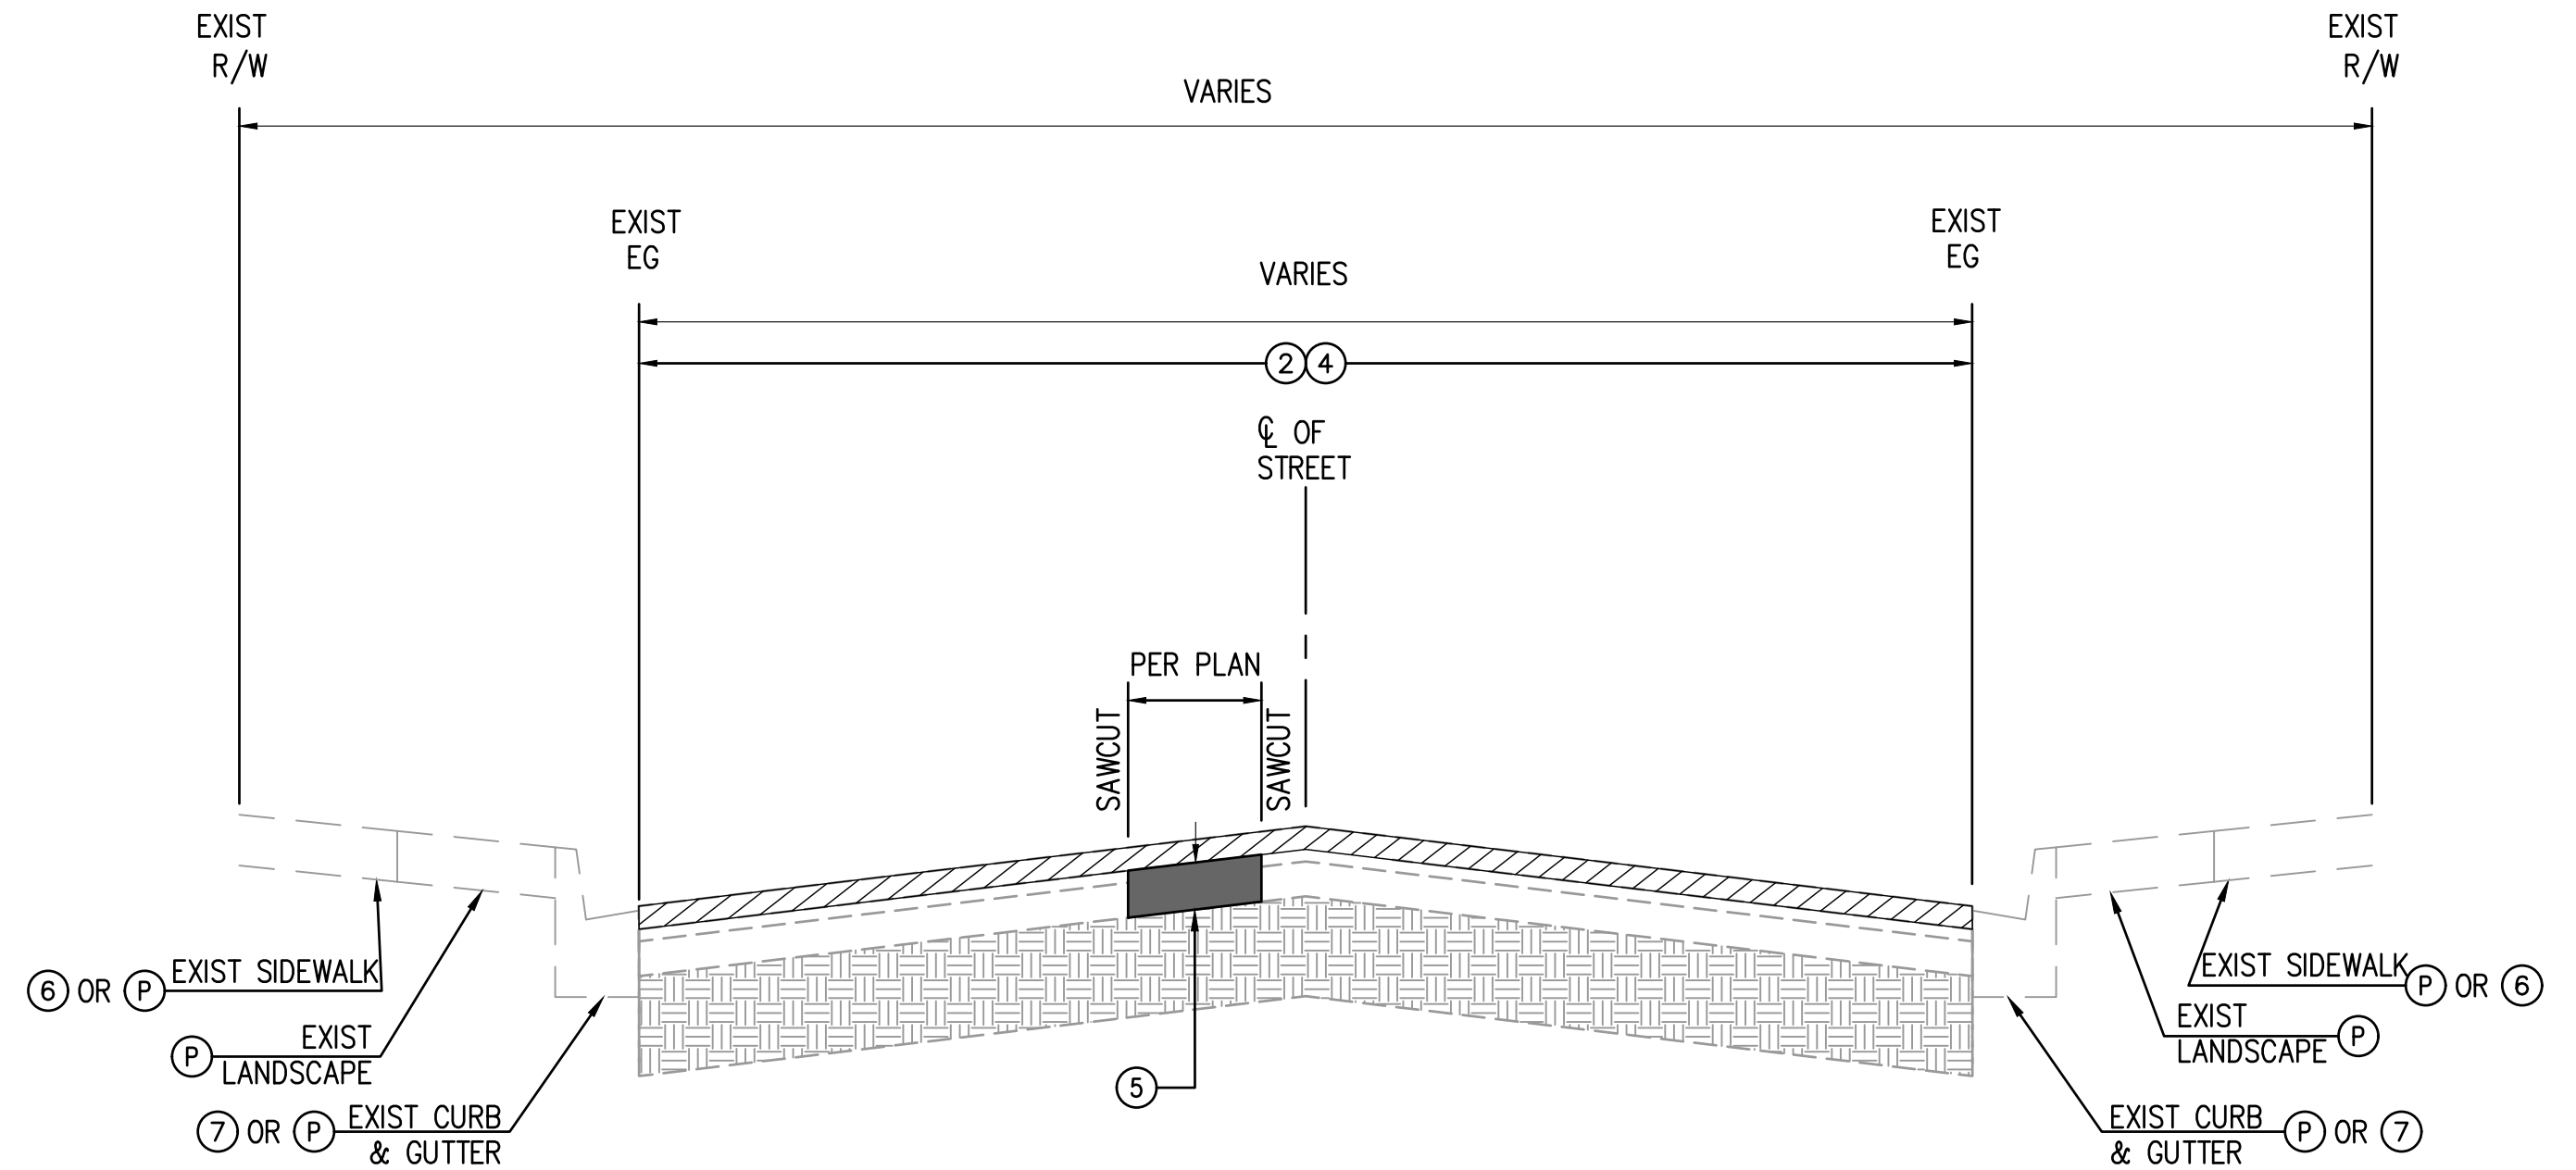

TYPICAL SECTION FOR VARIOUS STREETS
N.T.S.

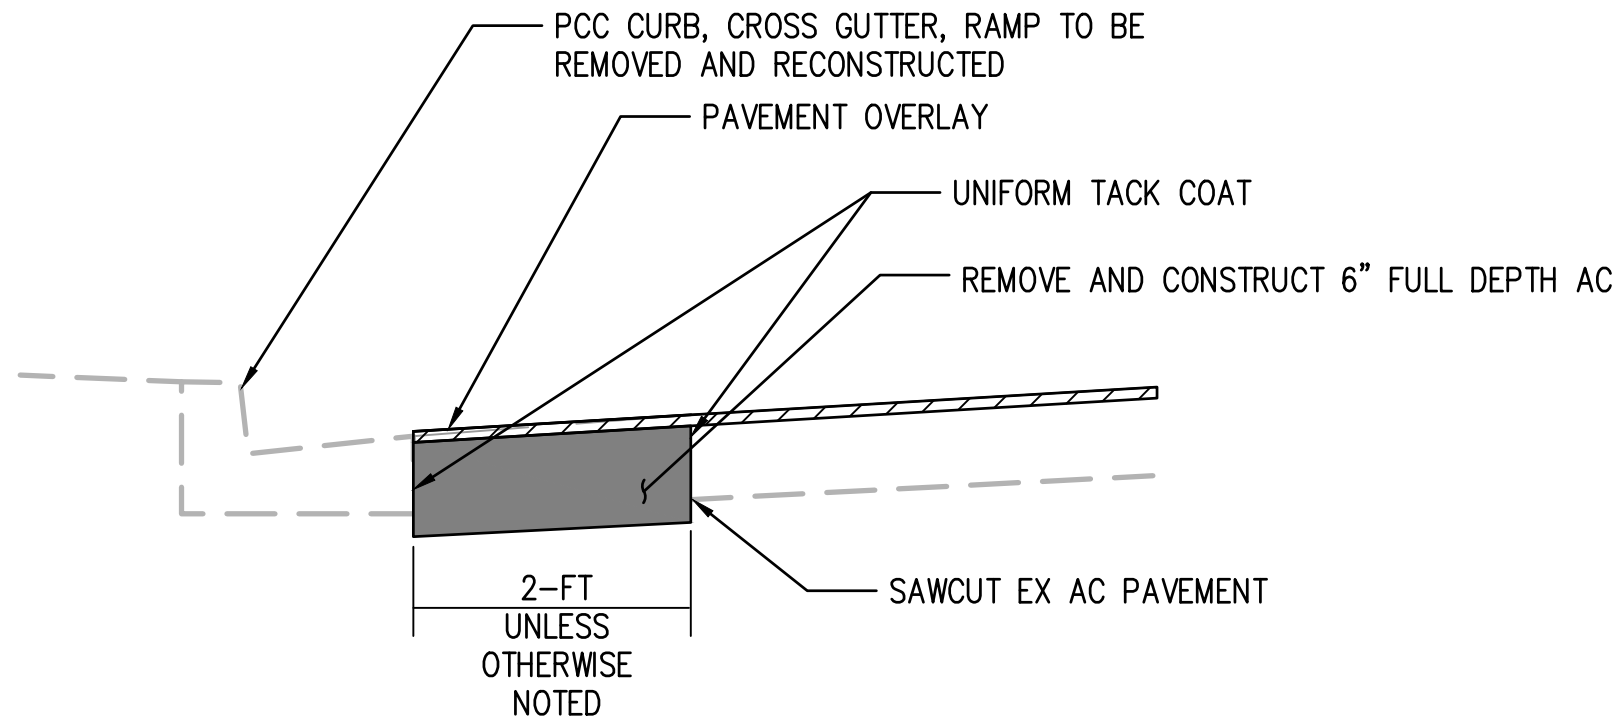

SLOT PAVEMENT DETAIL "1"
N.T.S.

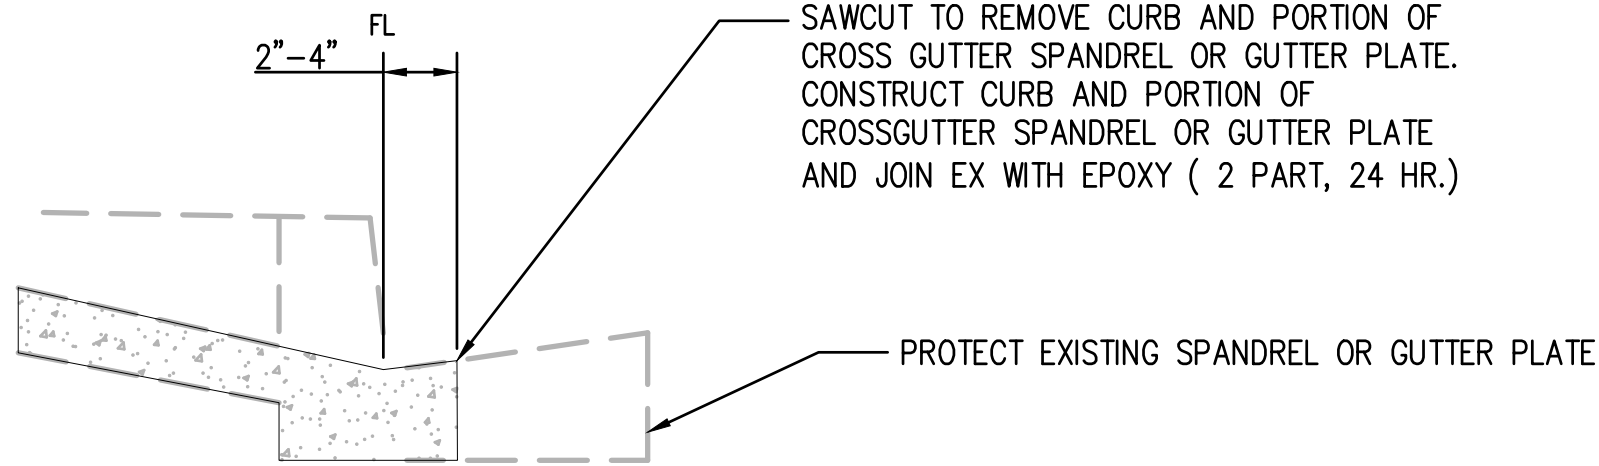

SAWCUT DETAIL "2" AT SPANDREL OR CROSS GUTTER
N.T.S.

CONSTRUCTION NOTES:

- ① COLD MILL EXISTING PAVEMENT 1.5-INCH UNIFORM DEPTH
- ② COLD MILL EXISTING PAVEMENT 2.5-INCH UNIFORM DEPTH
- ③ CONSTRUCT 1.5-INCH THICK ARHM OVERLAY
- ④ CONSTRUCT 2.5-INCH THICK ARHM OVERLAY
- ⑤ REMOVE EXISTING AC/AB AND CONSTRUCT 6-INCH FULL DEPTH ASPHALT CONCRETE PAVEMENT
- ⑥ REMOVE AND CONSTRUCT 4-INCH THICK PCC SIDEWALK PER SPPWC STD PLAN 113-2
- ⑦ REMOVE AND CONSTRUCT A2-8 CURB AND GUTTER PER SPPWC STD PLAN 120-3. MATCH EXISTING.
- ⑧ REMOVE AND CONSTRUCT A1-6 CURB PER SPPWC STD PLAN 120-3. MATCH EXISTING.
- ⑨ REMOVE AND CONSTRUCT CURB RAMP PER SPPWC STD PLAN 111-5, CASE AND TYPE PER PLAN
- ⑩ REMOVE AND CONSTRUCT CROSS GUTTER PER SPPWC STD PLAN 122-3
- ⑪ REMOVE AND CONSTRUCT LONGITUDINAL GUTTER PER SPPWC STD PLAN NO. 122-3
- ⑫ REMOVE AND CONSTRUCT ALLEY APPROACH PER SPPWC STD PLAN 130-3
- ⑬ REMOVE AND CONSTRUCT CURB DRAIN PER SPPWC STD PLAN 150-4
- ⑭ SEAL CRACKS OVER .25-INCH WIDE AND CONSTRUCT SLURRY SEAL, TYPE 2
- ⑮ NOT USED
- Ⓐ ADJUST TO GRADE (ITEM AS NOTED)
- Ⓐ ADJUST TO GRADE BY OTHERS (ITEM AS NOTED)
- Ⓐ PROTECT IN PLACE
- Ⓐ REMOVE

LEGEND

- REMOVE AND CONSTRUCT 6-INCH THICK AC PAVEMENT
- COLD MILL 1.5-INCH AC PAVEMENT AND OVERLAY 1.5-INCH ARHM
- COLD MILL 2.5-INCH AC PAVEMENT AND OVERLAY 2.5-INCH ARHM
- PCC IMPROVEMENTS
- SLURRY SEAL



Know what's below.
Call before you dig.

REVISIONS

NUMBER	DATE	INITIALS

REFERENCES

APPV'D




DRAWN BY	AM,MT	6/18/2024
CHECKED BY	KS	6/18/2024
DESIGNED BY	AM,MT,YC	6/18/2024
APPROVED	6/18/2024	Date
City Engineer		

CITY OF LOS ALAMITOS


STREET IMPROVEMENTS ON VARIOUS STREETS FY 2022-2023

DETAIL SHEET


SHEET 2 OF 10

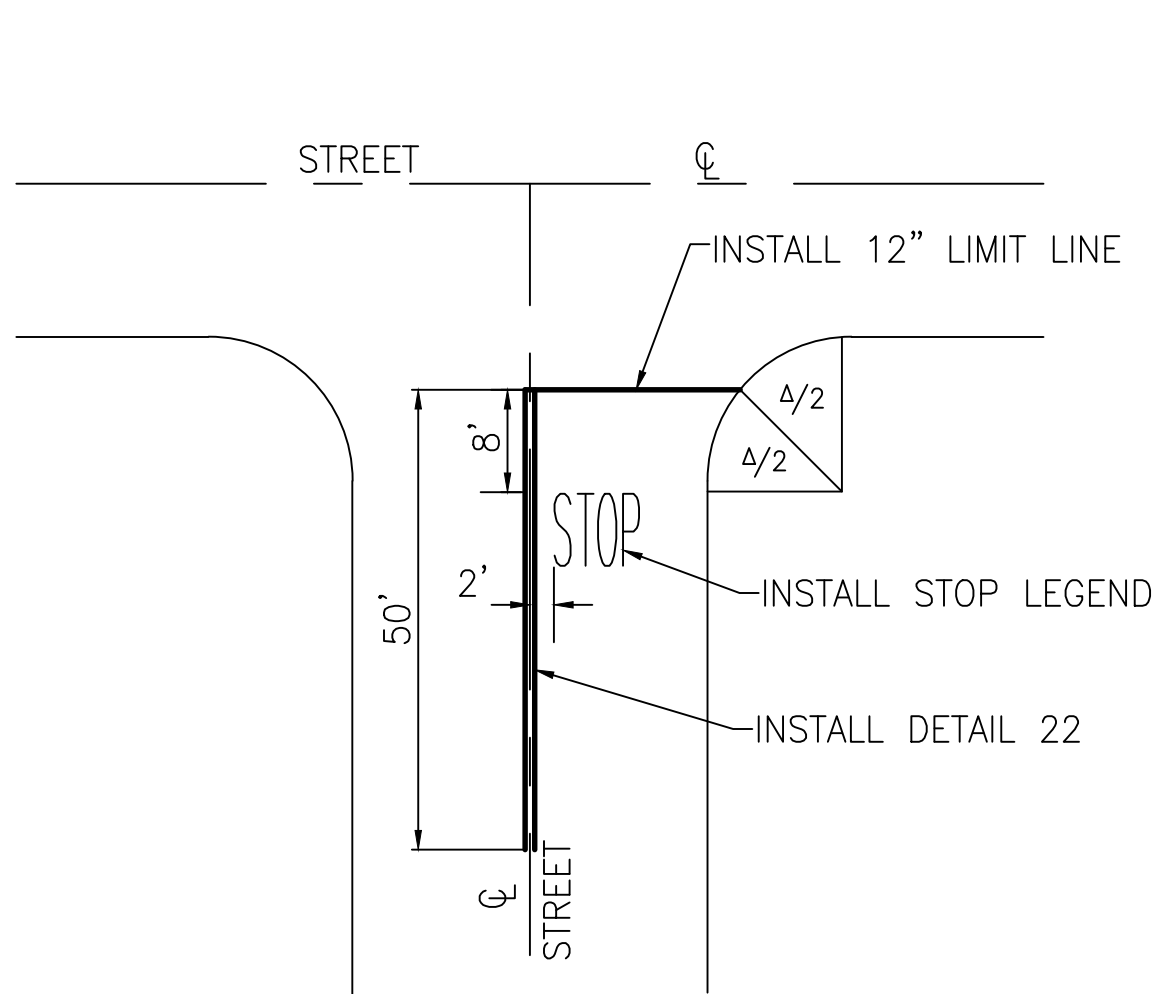


INTERSECTION STRIPING DETAIL
DETAIL "A"
N.T.S.

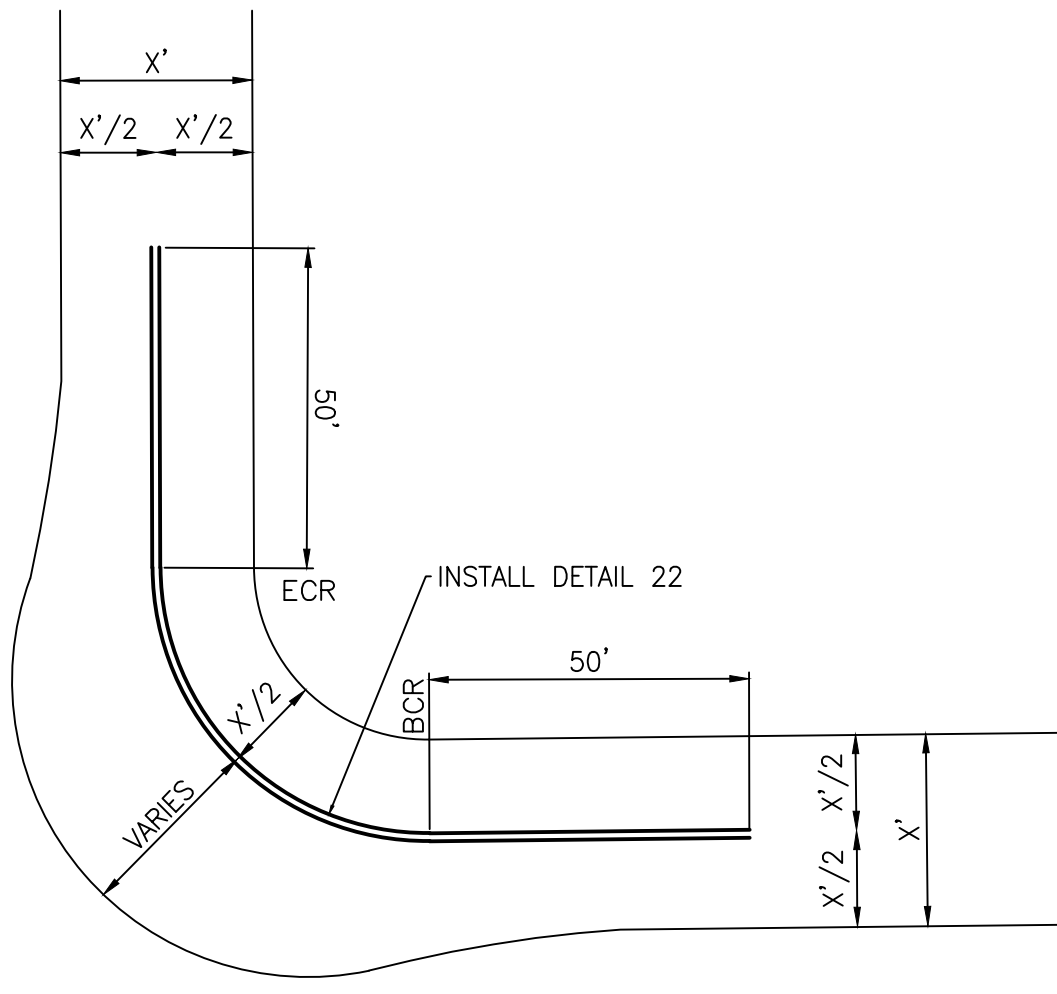


INTERSECTION STRIPING DETAIL
DETAIL "B"
N.T.S.

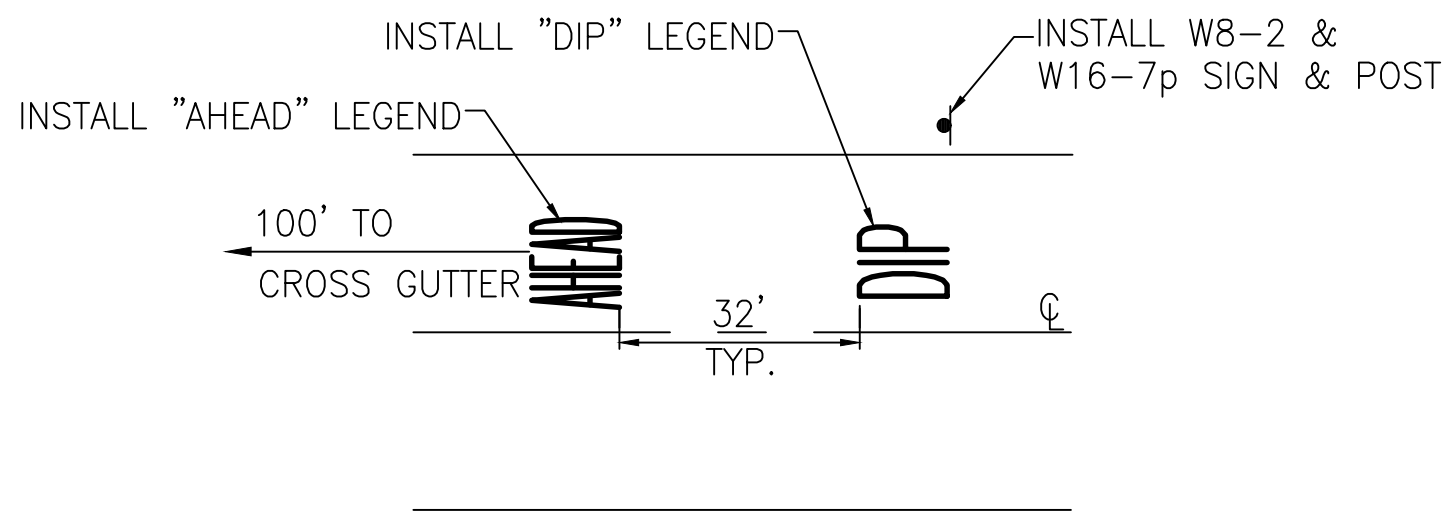


"DIP AHEAD"
PAVEMENT LEGEND DETAIL
DETAIL "C"
N.T.S.

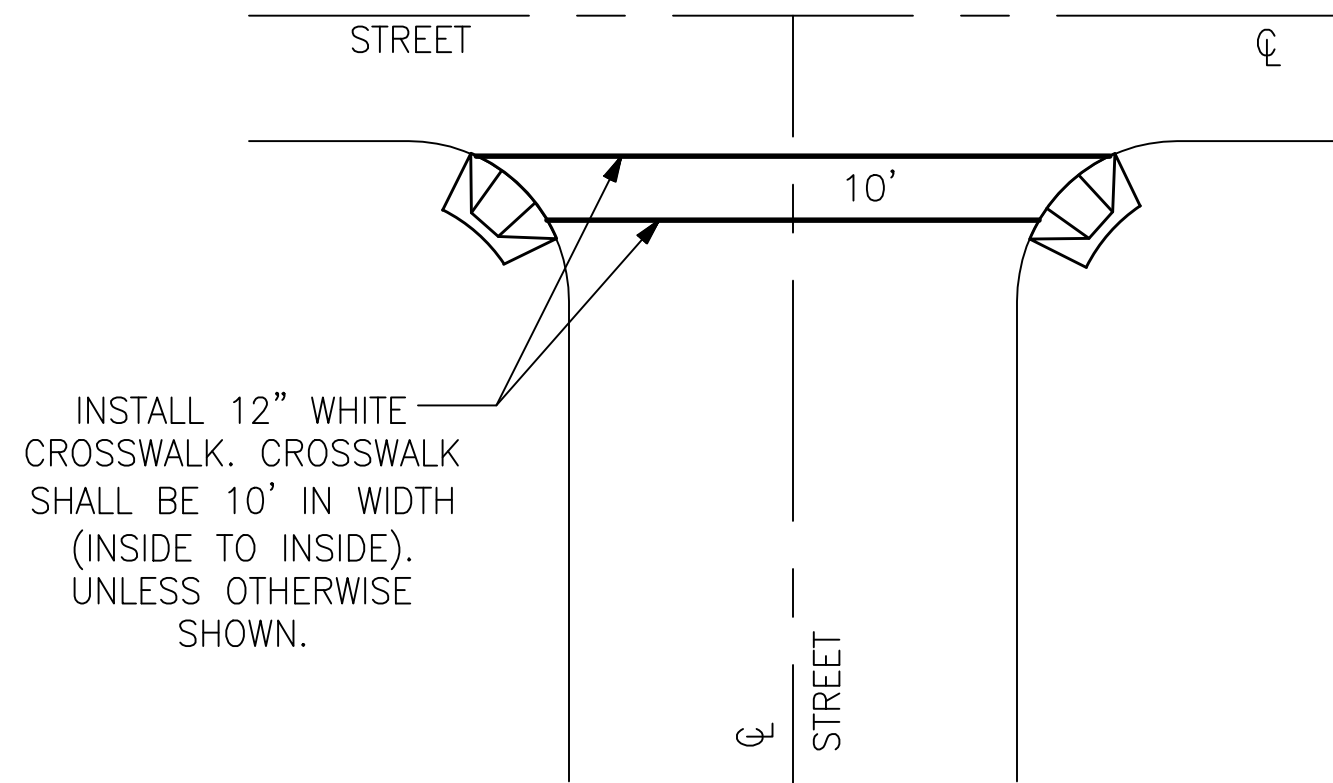


INTERSECTION CROSSWALK DETAIL
DETAIL "D"
N.T.S.

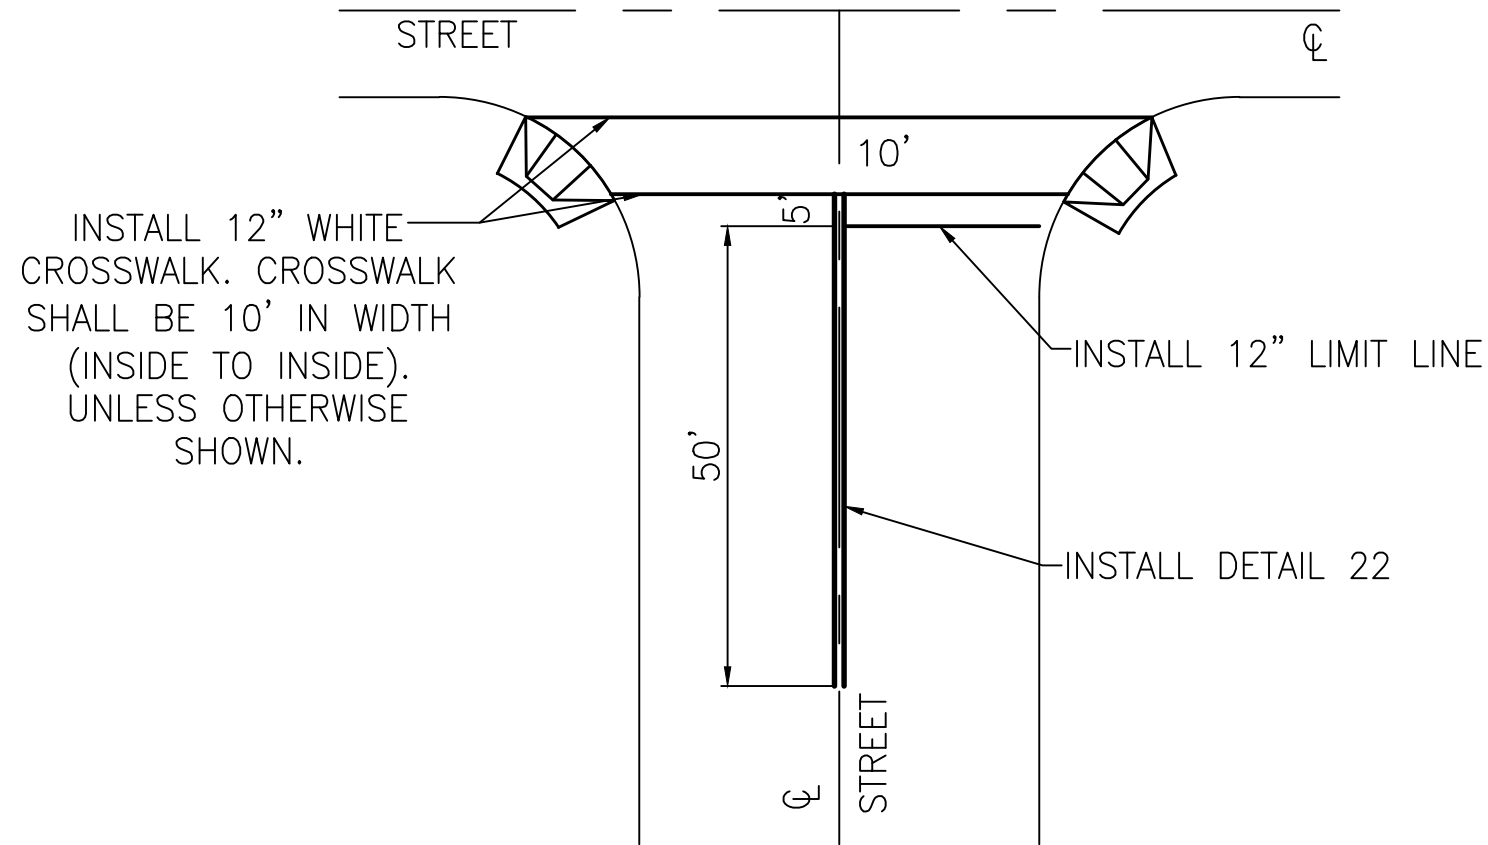


INTERSECTION STRIPING DETAIL
DETAIL "E"
N.T.S.

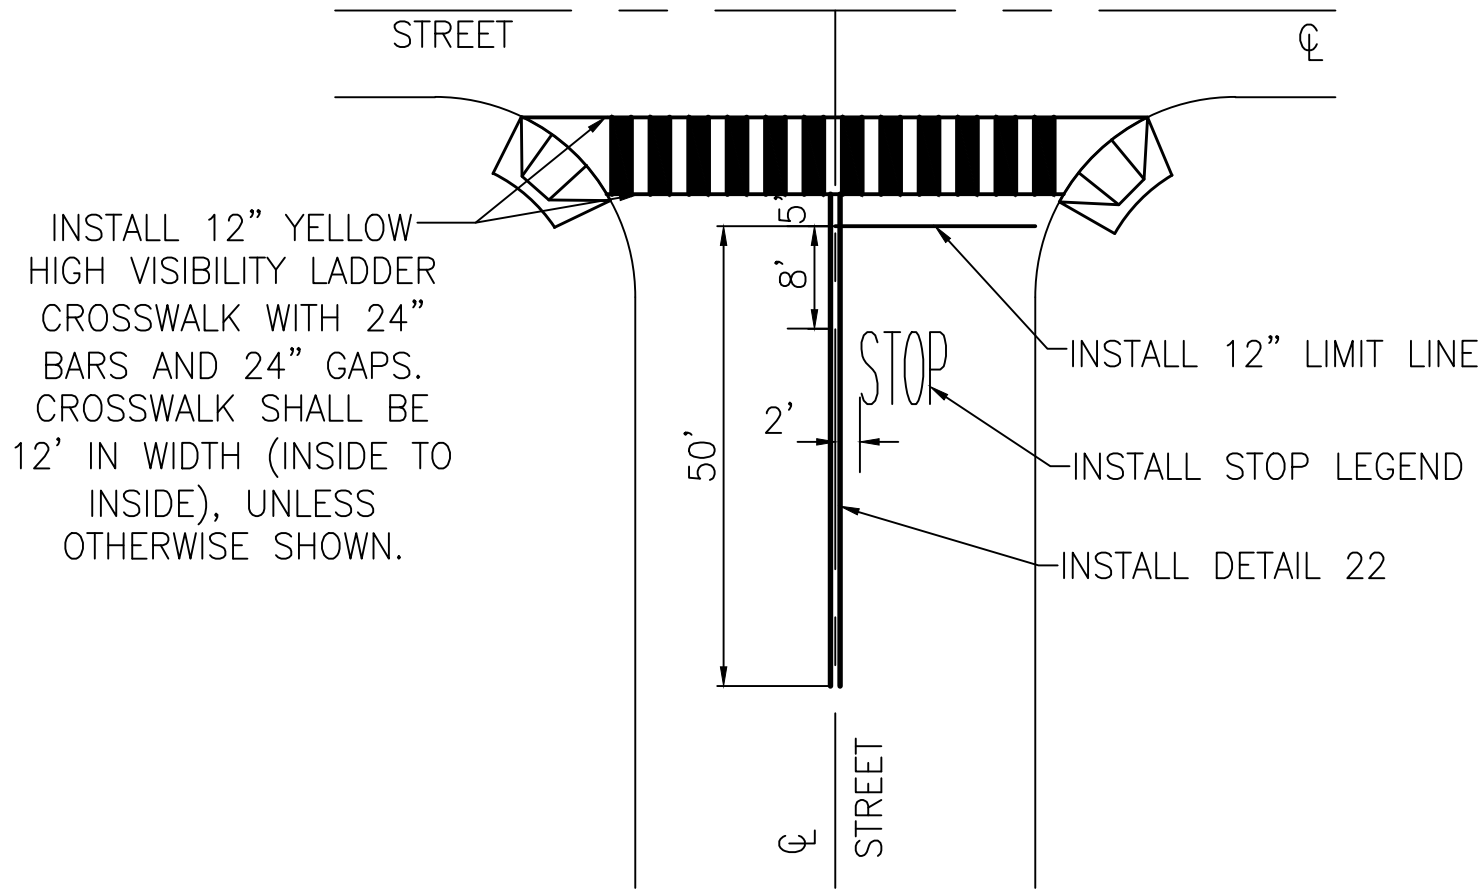

INTERSECTION STRIPING DETAIL
DETAIL "F"
N.T.S.

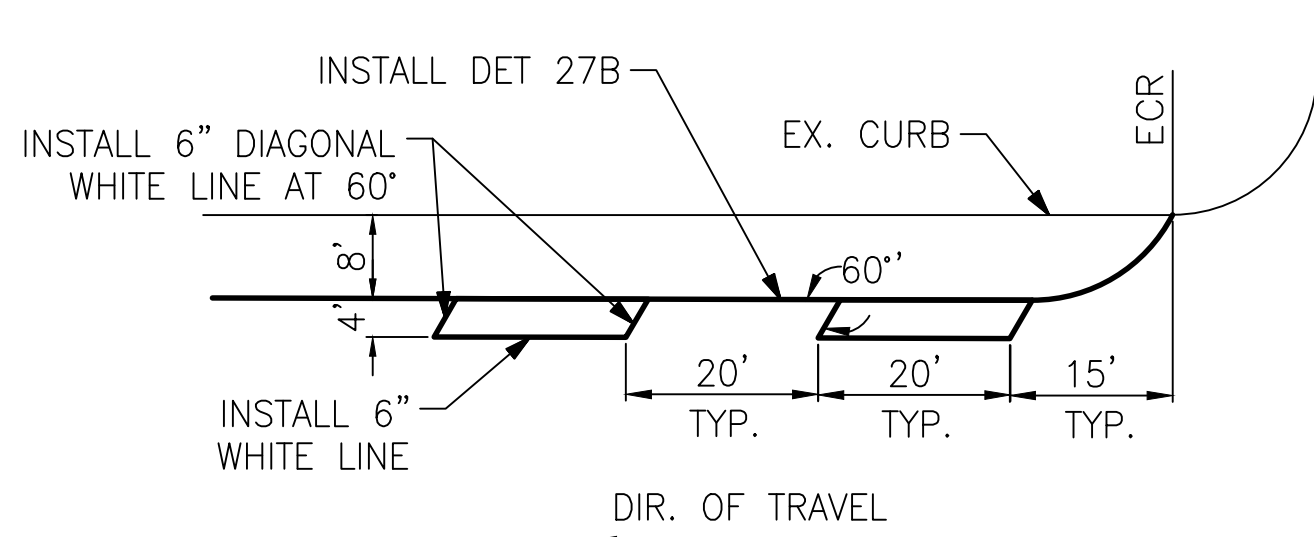

60° ON-STREET PARKING
BUFFER DETAIL
DETAIL "G"
N.T.S.

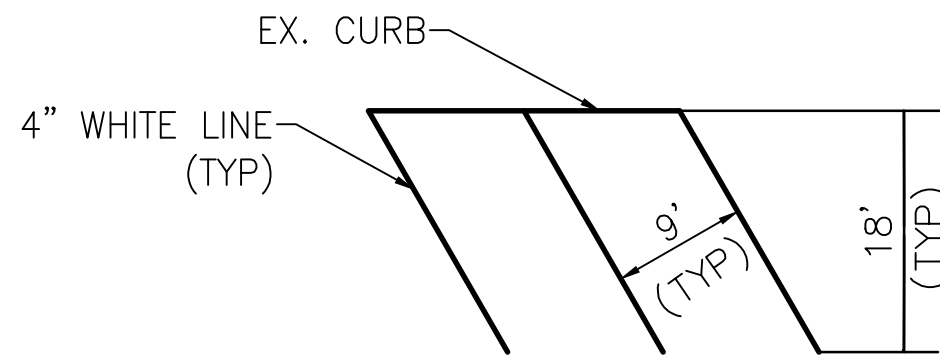

60° PARKING STALL DETAIL
DETAIL "H"
N.T.S.



NUMBER	DATE	INITIALS	

REVISIONS

REFERENCES

APPV'D



DRAWN BY	MT
CHECKED BY	MP
DESIGNED BY	MT

APPROVED	7/2/2024
City Engineer	Date

DATE

7/2/2024
7/2/2024
7/2/2024


CITY OF LOS ALAMITOS

STREET IMPROVEMENTS ON VARIOUS STREETS FY 2022-2023


STRIPING DETAIL SHEET

SHEET 3 OF 10


USER: mtruong DATE: Jul 02, 2024 - 6:35pm FILE: W:\WE-CAL\los alamitos\city of\112154 - los alamitos measure\900-PS&E\901-plans\PL-DET-STRIPING-02.dwg

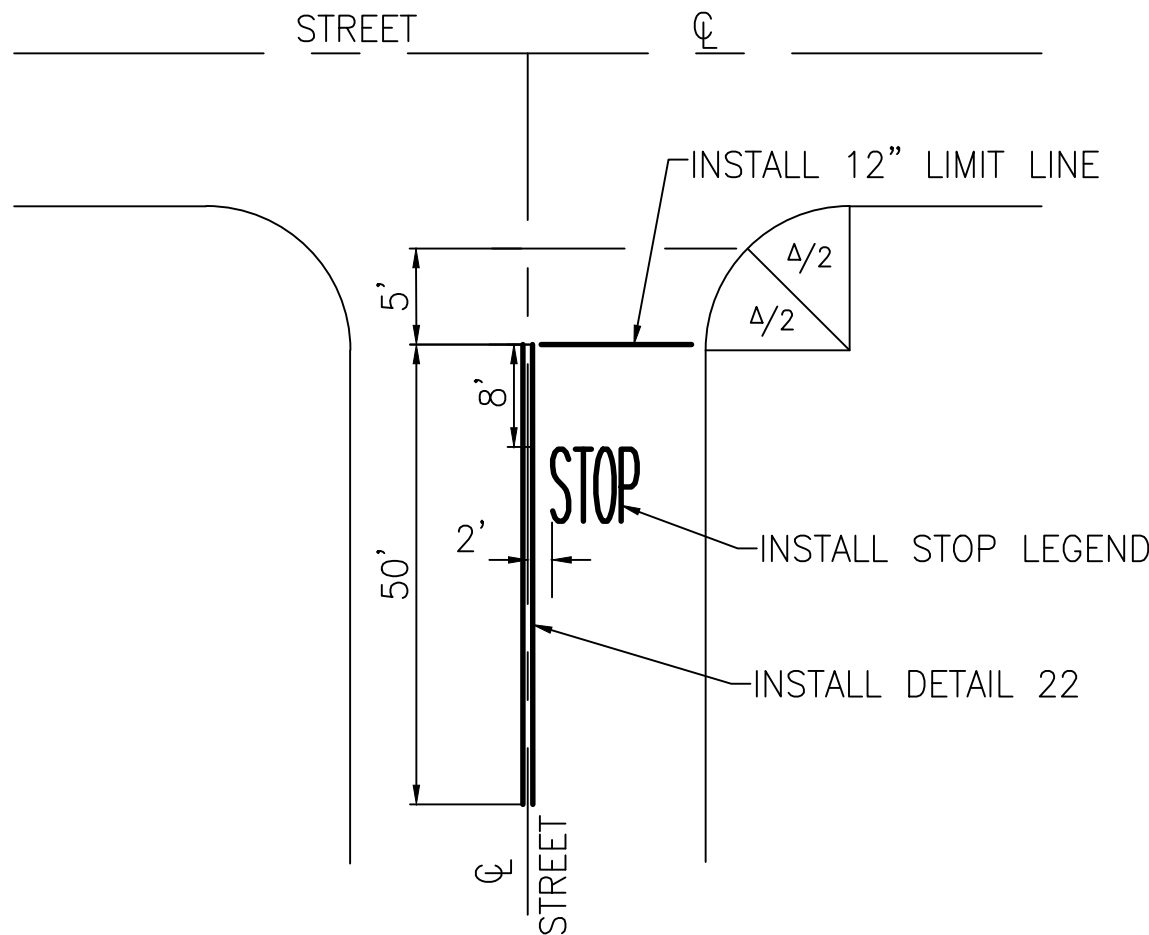


INTERSECTION STRIPING DETAIL
DETAIL "I"
N.T.S.

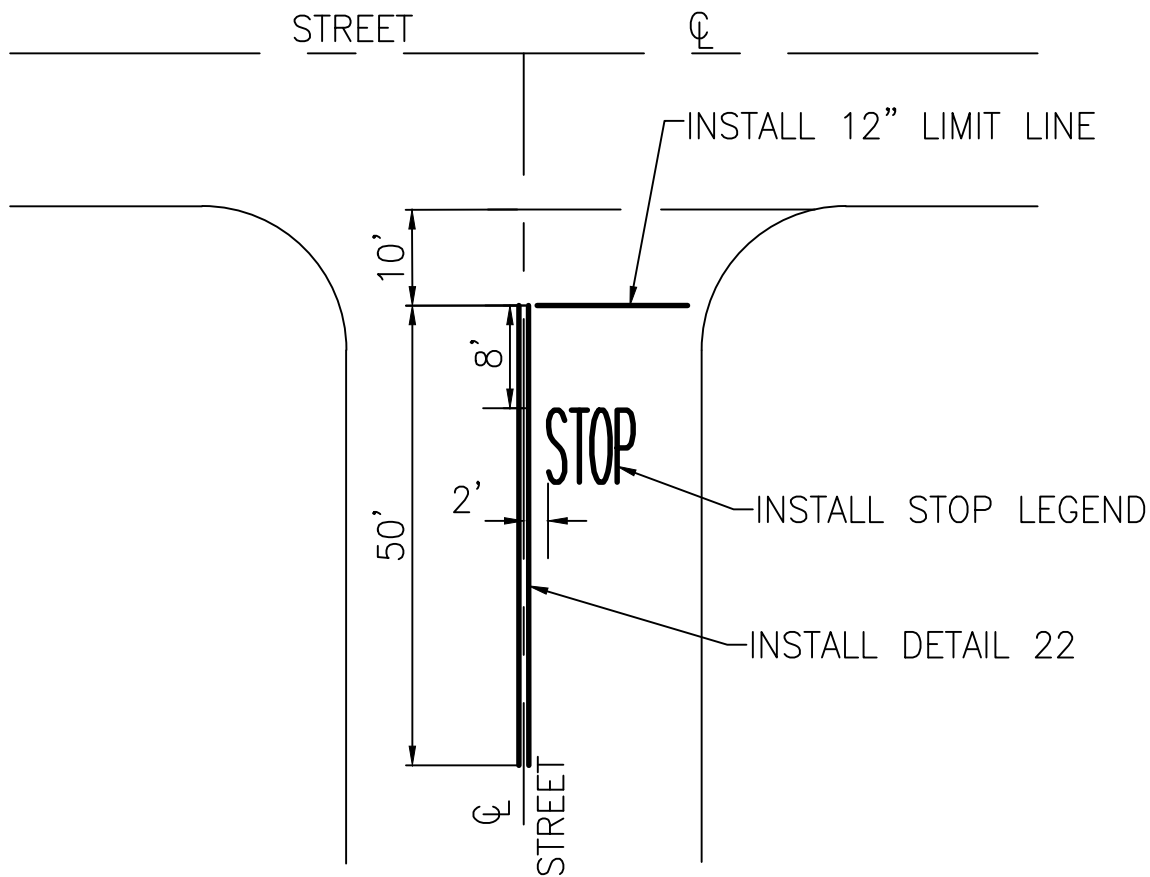

INTERSECTION STRIPING DETAIL
DETAIL "J"
N.T.S.

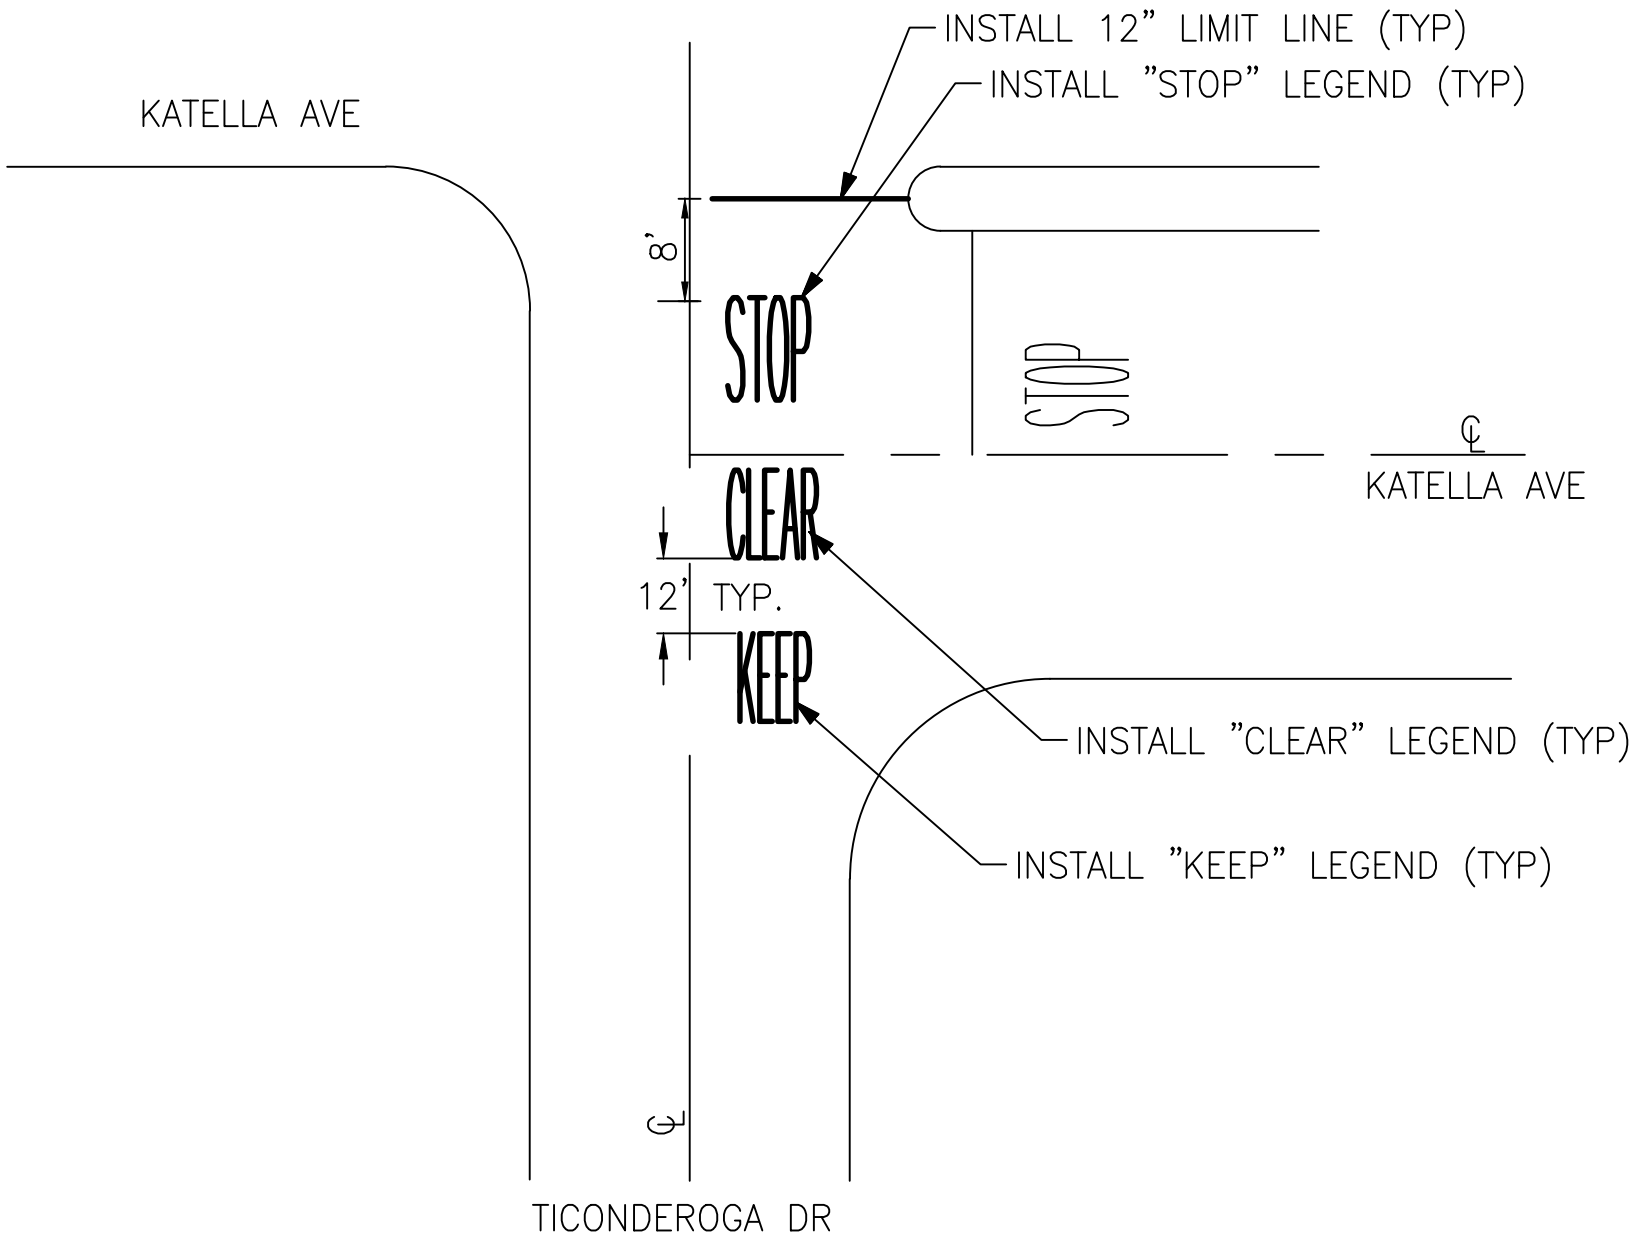

TICONDEROGA DR AT KATELLA AVE
STRIPING DETAIL
(SOUTH LEG)
DETAIL "K"
N.T.S.

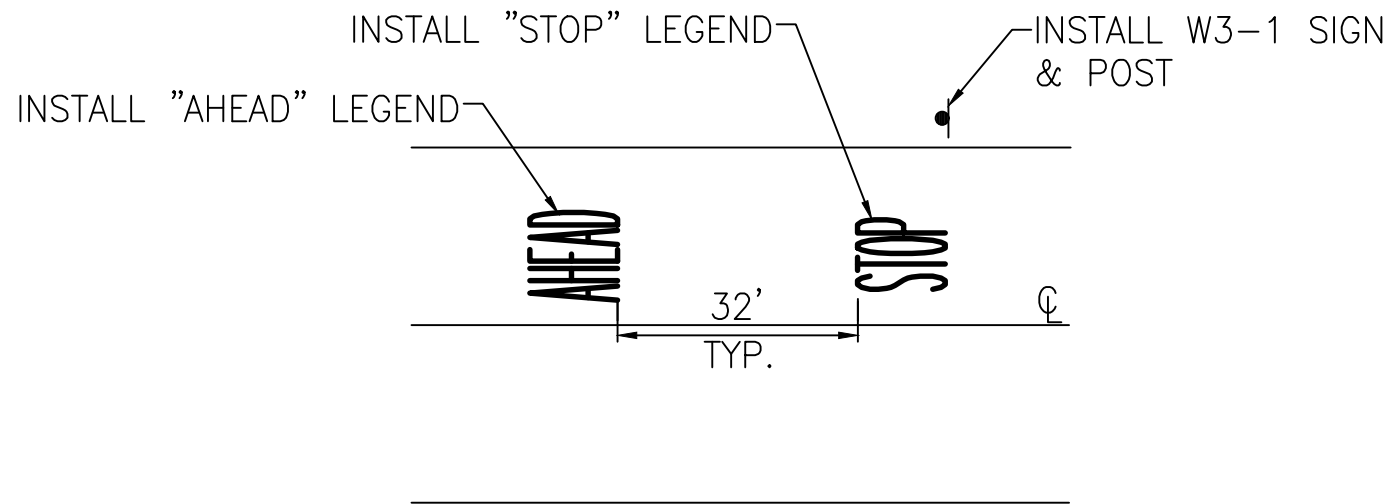

"STOP AHEAD"
PAVEMENT LEGEND DETAIL
DETAIL "L"
N.T.S.



REVISIONS			
NUMBER	DATE	INITIALS	

REFERENCES	
APPV'D	



		DATE
DRAWN BY	MT	7/2/2024
CHECKED BY	MP	7/2/2024
DESIGNED BY	MT	7/2/2024
APPROVED		7/2/2024
City Engineer		Date

CITY OF LOS ALAMITOS	
STREET IMPROVEMENTS ON VARIOUS STREETS FY 2022–2023	
STRIPING DETAIL SHEET	

SHEET 4 OF 10

FILE: W:\WE-CAL\Los Alamitos, City of\112154 - Los Alamitos Measure Y000-PSE\901-Plans\PL-ROAD-1.dwg

USER: YCruz
DATE: Jul 01, 2024 - 1:53pm

CONSTRUCTION NOTES


- ① COLD MILL EXISTING PAVEMENT 1.5-INCH UNIFORM DEPTH
- ② COLD MILL EXISTING PAVEMENT 2.5-INCH UNIFORM DEPTH
- ③ CONSTRUCT 1.5-INCH THICK ARHM OVERLAY
- ④ CONSTRUCT 2.5-INCH THICK ARHM OVERLAY
- ⑤ REMOVE EXISTING AC/AB AND CONSTRUCT 6-INCH FULL DEPTH ASPHALT CONCRETE PAVEMENT
- ⑥ REMOVE AND CONSTRUCT 4-INCH THICK PCC SIDEWALK PER SPPWC STD PLAN 113-2
- ⑦ REMOVE AND CONSTRUCT A2-8 CURB AND GUTTER PER SPPWC STD PLAN 120-3. MATCH EXISTING.
- ⑨ REMOVE AND CONSTRUCT CURB RAMP PER SPPWC STD PLAN 111-5, CASE AND TYPE PER PLAN
- ⑬ REMOVE AND CONSTRUCT CURB DRAIN PER SPPWC STD PLAN 150-4
- ⑭ SEAL CRACKS OVER .25-INCH WIDE AND CONSTRUCT SLURRY SEAL, TYPE 2
- ⑮ NOT USED
- AG ADJUST TO GRADE (ITEM AS NOTED)
- P PROTECT IN PLACE

LEGEND


- REMOVE AND CONSTRUCT 6-INCH THICK AC PAVEMENT
- COLD MILL 1.5-INCH AC PAVEMENT AND OVERLAY 1.5-INCH ARHM
- COLD MILL 2.5-INCH AC PAVEMENT AND OVERLAY 2.5-INCH ARHM
- PCC IMPROVEMENTS
- SLURRY SEAL

SIGNING AND STRIPING CONSTRUCTION NOTES:

- ① INSTALL STRIPING DETAIL AND/OR PAVEMENT MARKING AS SHOWN.
- ② REMOVE CONFLICTING STRIPING.
- ③ INSTALL 6" DIAGONAL WHITE LINE AT 45°, 5' O.C.
- ④ INSTALL 6" WHITE LINE AS SHOWN, UNLESS OTHERWISE NOTED.
- ⑤ REMOVE SIGN(S) AS NOTED.
- ⑥ REMOVE SIGN(S) AND POST AS NOTED.
- ⑦ INSTALL SIGN(S) AS NOTED.
- ⑧ INSTALL SIGN(S) AND POST AS NOTED.
- ⑨ INSTALL 12" THERMOPLASTIC WHITE LIMIT LINE.

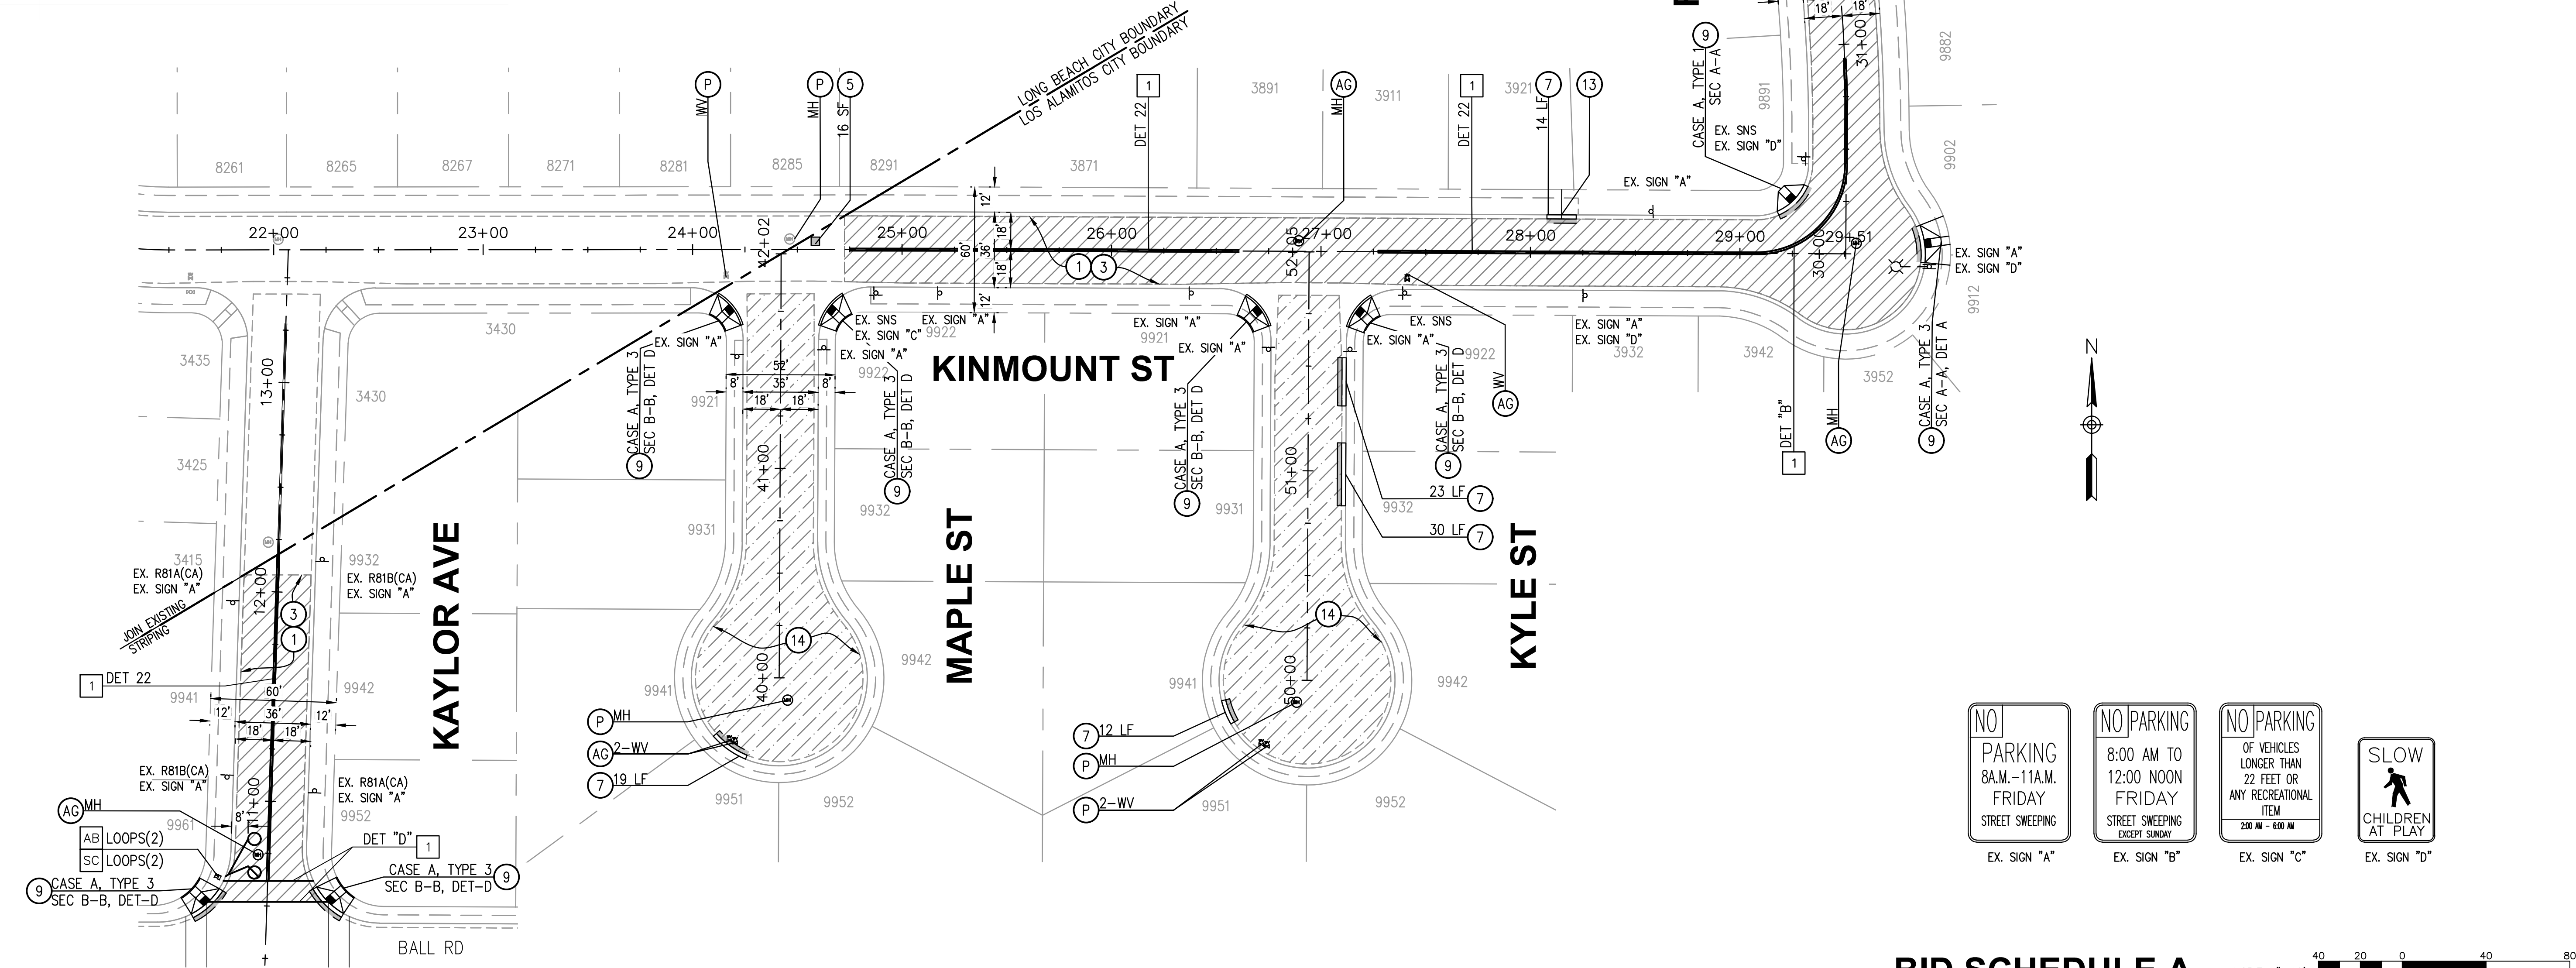

BID SCHEDULE A



REVISIONS			
NUMBER	DATE	INITIALS	

REFERENCES	
APPV'D	




WILLDAN Engineering		
3401 East Kabinia Ave. Suite 400, Anaheim, California 92805 714/978-8200 Fax 714/978-8289		
DRAWN BY	AM,MT	6/18/2024
CHECKED BY	KS	6/18/2024
DESIGNED BY	AM,MT,YC	6/18/2024
APPROVED	6/18/2024	
City Engineer	Date	


CITY OF LOS ALAMITOS		
STREET IMPROVEMENTS ON VARIOUS STREETS FY 2022-2023		
KINMOUNT ST CITY LIMIT TO FARNHAM AVE	KAYLOR AVE BALL RD TO CITY LIMIT	KYLE ST SOUTH END TO KINMOUNT ST
FARNHAM AVE KINMOUNT ST TO CITY LIMIT	MAPLE ST SOUTH END TO KINMOUNT ST	

FILE: W:\WE-C\Los Alamitos\city of\112154 - los alamitos measure\900-PS&E\901-Plans\PL-ROAD-2.dwg

USER: YCruz
DATE: Jun 18, 2024 - 3:24pm

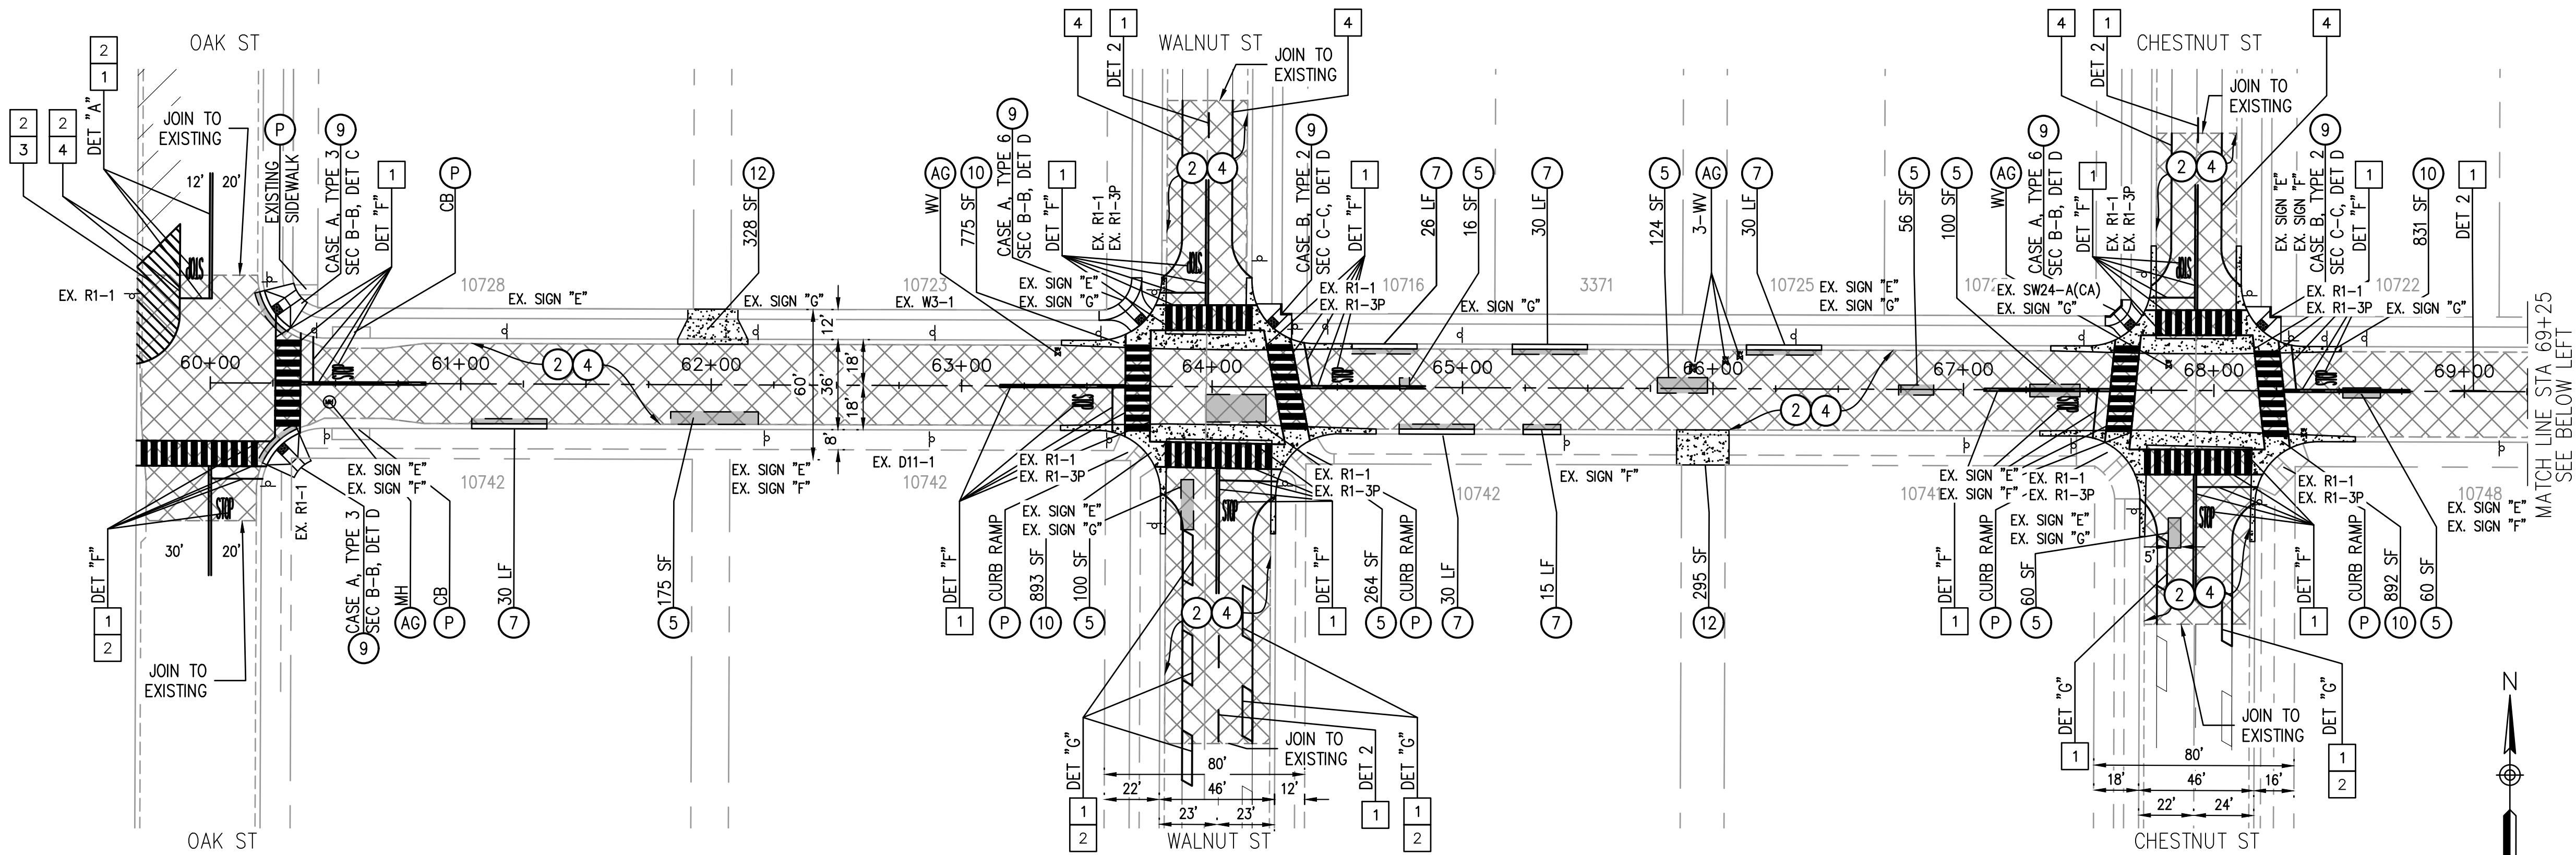

CATALINA ST

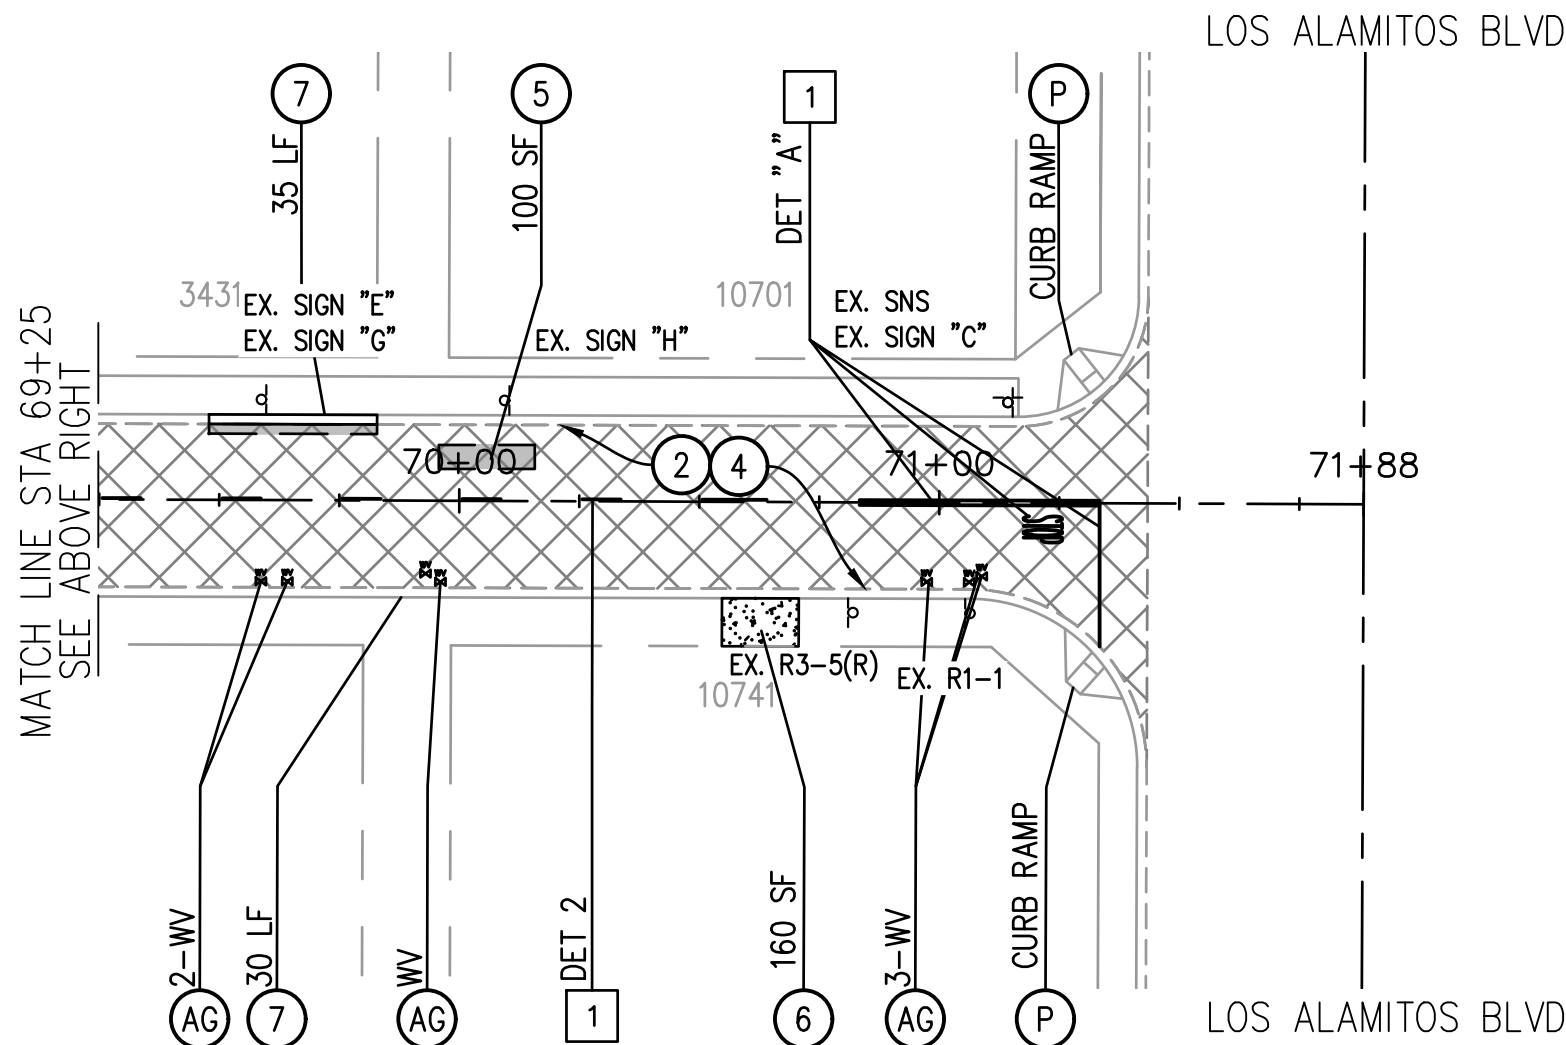

CATALINA ST

CONSTRUCTION NOTES

- 1 COLD MILL EXISTING PAVEMENT 1.5-INCH UNIFORM DEPTH
- 2 COLD MILL EXISTING PAVEMENT 2.5-INCH UNIFORM DEPTH
- 3 CONSTRUCT 1.5-INCH THICK ARHM OVERLAY
- 4 CONSTRUCT 2.5-INCH THICK ARHM OVERLAY
- 5 REMOVE EXISTING AC/AB AND CONSTRUCT 6-INCH FULL DEPTH ASPHALT CONCRETE PAVEMENT
- 6 REMOVE AND CONSTRUCT 4-INCH THICK PCC SIDEWALK PER SPPWC STD PLAN 113-2
- 7 REMOVE AND CONSTRUCT A2-8 CURB AND GUTTER PER SPPWC STD PLAN 120-3. MATCH EXISTING.
- 8 REMOVE AND CONSTRUCT CURB RAMP PER SPPWC STD PLAN 111-5, CASE AND TYPE PER PLAN
- 9 REMOVE AND CONSTRUCT CROSS GUTTER PER SPPWC STD PLAN 122-3
- 10 REMOVE AND CONSTRUCT ALLEY APPROACH PER SPPWC STD PLAN 130-3
- 12 ADJUST TO GRADE (ITEM AS NOTED)
- AG ADJUST TO GRADE (ITEM AS NOTED)
- P PROTECT IN PLACE

LEGEND


- 5 REMOVE AND CONSTRUCT 6-INCH THICK AC PAVEMENT
- 2.5 COLD MILL 2.5-INCH AC PAVEMENT AND OVERLAY 2.5-INCH ARHM
- 4 PCC IMPROVEMENTS

SIGNING AND STRIPING CONSTRUCTION NOTES:

- 1 INSTALL STRIPING DETAIL AND/OR PAVEMENT MARKING AS SHOWN.
- 2 REMOVE CONFLICTING STRIPING.
- 3 INSTALL 6" DIAGONAL WHITE LINE AT 45°, 5' O.C.
- 4 INSTALL 6" WHITE LINE AS SHOWN, UNLESS OTHERWISE NOTED.
- 5 REMOVE SIGN(S) AS NOTED.
- 6 REMOVE SIGN(S) AND POST AS NOTED.
- 7 INSTALL SIGN(S) AS NOTED.
- 8 INSTALL SIGN(S) AND POST AS NOTED.
- 9 INSTALL 12" THERMOPLASTIC WHITE LIMIT LINE.



BID SCHEDULE A



REVISIONS

NUMBER	DATE	INITIALS	

REFERENCES

APP'D



DRAWN BY	AM,MT	6/18/2024
CHECKED BY	KS	6/18/2024
DESIGNED BY	AM,MT,YC	6/18/2024
APPROVED		6/18/2024
City Engineer		Date

CITY OF LOS ALAMITOS

STREET IMPROVEMENTS ON VARIOUS STREETS FY 2022-2023

CATALINA ST
FROM OAK ST TO LOS ALAMITOS BLVD

SHEET 6 OF 10

SIGNING AND STRIPING CONSTRUCTION NOTES:


- 1
- INSTALL STRIPING DETAIL AND/OR PAVEMENT MARKING AS SHOWN.
- 2
- REMOVE CONFLICTING STRIPING.
- 3
- INSTALL 6" DIAGONAL WHITE LINE AT 45°; 5' O.C.
- 4
- INSTALL 6" WHITE LINE AS SHOWN, UNLESS OTHERWISE NOTED.
- 5
- REMOVE SIGN(S) AS NOTED.
- 6
- REMOVE SIGN(S) AND POST AS NOTED.
- 7
- INSTALL SIGN(S) AS NOTED.
- 8
- INSTALL SIGN(S) AND POST AS NOTED.
- 9
- INSTALL 12" THERMOPLASTIC WHITE LIMIT LINE.

CONSTRUCTION NOTES


- 1
- COLD MILL EXISTING PAVEMENT 1.5-INCH UNIFORM DEPTH
- 3
- CONSTRUCT 1.5-INCH THICK ARHM OVERLAY
- 5
- REMOVE EXISTING AC/AB AND CONSTRUCT 6-INCH FULL DEPTH ASPHALT CONCRETE PAVEMENT
- 6
- REMOVE AND CONSTRUCT 4-INCH THICK PCC SIDEWALK PER SPPWC STD PLAN 113-2
- 9
- REMOVE AND CONSTRUCT CURB RAMP PER SPPWC STD PLAN 111-5, CASE AND TYPE PER PLAN
- 11
- REMOVE AND CONSTRUCT LONGITUDINAL GUTTER PER SPPWC STD PLAN NO. 122-3
- AG
- ADJUST TO GRADE (ITEM AS NOTED)
- P
- PROTECT IN PLACE

LEGEND

- REMOVE AND CONSTRUCT 6-INCH THICK AC PAVEMENT
- COLD MILL 1.5-INCH AC PAVEMENT AND OVERLAY 1.5-INCH ARHM
- PCC IMPROVEMENTS

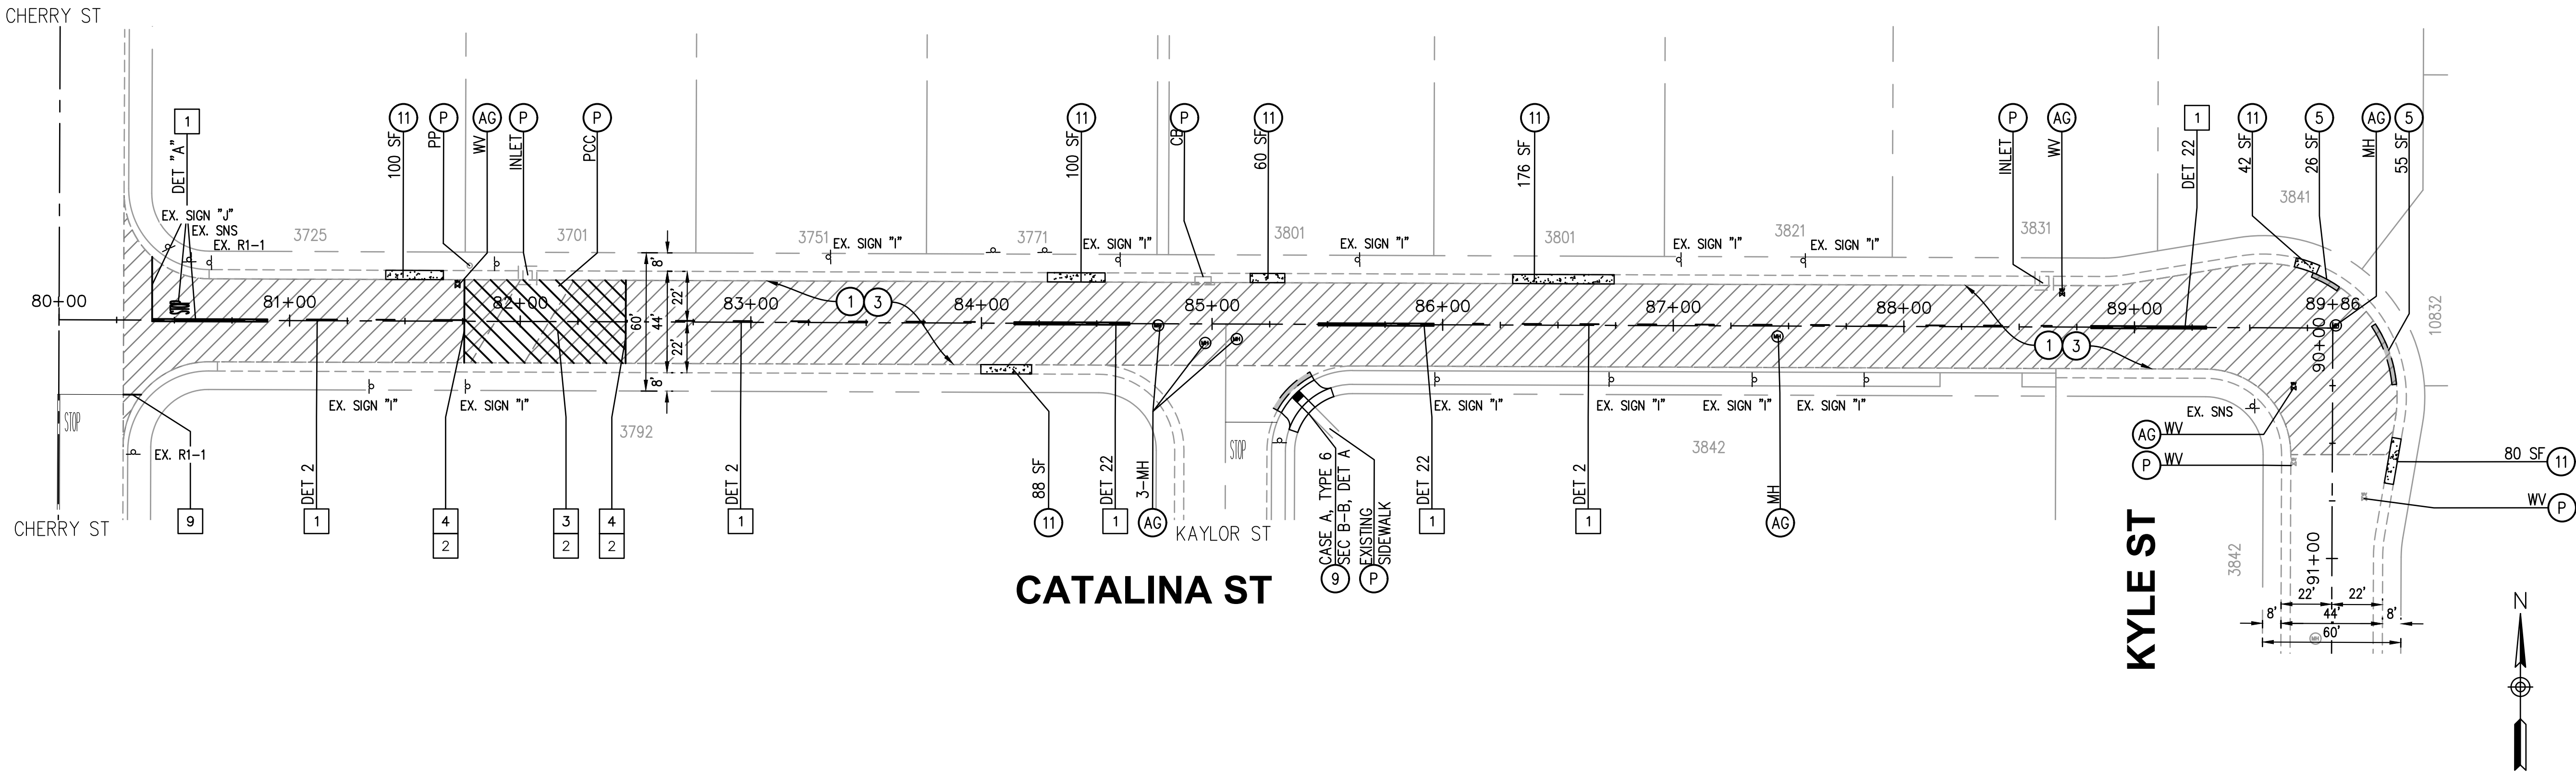


BID SCHEDULE A



 what's below. call before you dig.	REVISIONS			REFERENCES		 2401 East Katella Ave., Suite 402, Anaheim, California 92805 714.978-8200 Fax 714.978-8299 <table><tr><td>DRAWN BY</td><td>AM,MT</td><td>6/18/2024</td></tr><tr><td>CHECKED BY</td><td>KS</td><td>6/18/2024</td></tr><tr><td>DESIGNED BY</td><td>AM,MT,YC</td><td>6/18/2024</td></tr><tr><td>APPROVED</td><td colspan="2">6/18/2024</td></tr><tr><td>City Engineer</td><td colspan="2">Date</td></tr></table>	DRAWN BY	AM,MT	6/18/2024	CHECKED BY	KS	6/18/2024	DESIGNED BY	AM,MT,YC	6/18/2024	APPROVED	6/18/2024		City Engineer	Date		CITY OF LOS ALAMITOS		SHEET 7 OF 10
	DRAWN BY	AM,MT	6/18/2024																					
	CHECKED BY	KS	6/18/2024																					
	DESIGNED BY	AM,MT,YC	6/18/2024																					
	APPROVED	6/18/2024																						
	City Engineer	Date																						
	NUMBER	DATE	INITIALS	APP'VD			STREET IMPROVEMENTS ON VARIOUS STREETS FY 2022-2023																	
				CATALINA ST																				
				FROM CHERRY ST TO KYLE ST																				

USER: YCruz
DATE: Jun 18, 2024 - 3:35pm
FILE: W:\WE-C\los alamitos\city of\112154 - los alamitos measure\900-PS&E\901-plans\PL-ROAD-4.dwg

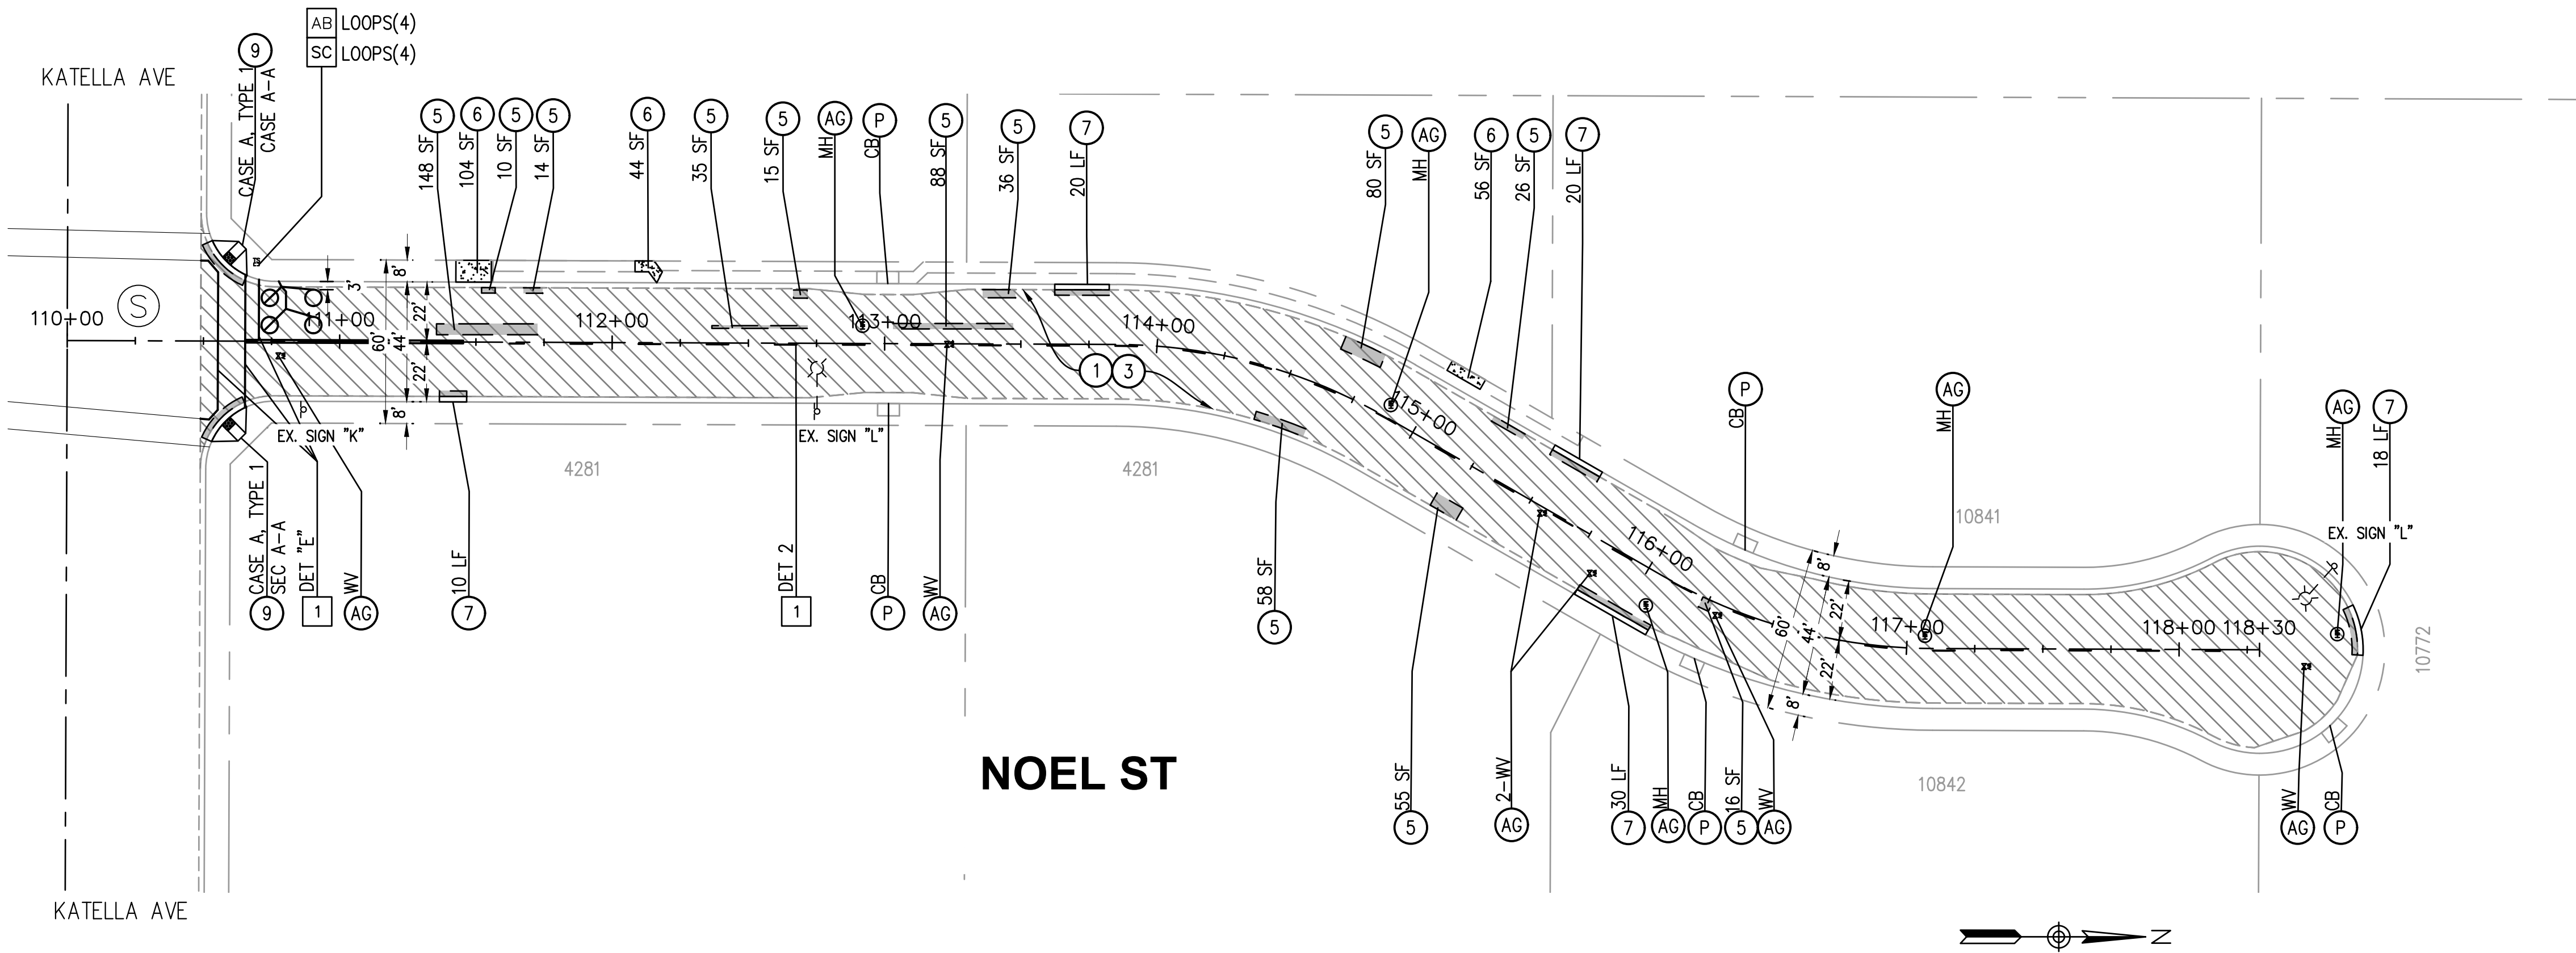

CONSTRUCTION NOTES

- 1 COLD MILL EXISTING PAVEMENT 1.5-INCH UNIFORM DEPTH
- 3 CONSTRUCT 1.5-INCH THICK ARHM OVERLAY
- 5 REMOVE EXISTING AC/AB AND CONSTRUCT 6-INCH FULL DEPTH ASPHALT CONCRETE PAVEMENT
- 6 REMOVE AND CONSTRUCT 4-INCH THICK PCC SIDEWALK PER SPPWC STD PLAN 113-2
- 7 REMOVE AND CONSTRUCT A2-8 CURB AND GUTTER PER SPPWC STD PLAN 120-3. MATCH EXISTING.
- 9 REMOVE AND CONSTRUCT CURB RAMP PER SPPWC STD PLAN 111-5, CASE AND TYPE PER PLAN
- AG ADJUST TO GRADE (ITEM AS NOTED)
- P PROTECT IN PLACE

LEGEND


- REMOVE AND CONSTRUCT 6-INCH THICK AC PAVEMENT
- COLD MILL 1.5-INCH AC PAVEMENT AND OVERLAY 1.5-INCH ARHM
- PCC IMPROVEMENTS

LEGEND


- SIGNALIZED INTERSECTION

SIGNING AND STRIPING CONSTRUCTION NOTES:

- 1 INSTALL STRIPING DETAIL AND/OR PAVEMENT MARKING AS SHOWN.
- 2 REMOVE CONFLICTING STRIPING.
- 3 INSTALL 6" DIAGONAL WHITE LINE AT 45°, 5' O.C.
- 4 INSTALL 6" WHITE LINE AS SHOWN, UNLESS OTHERWISE NOTED.
- 5 REMOVE SIGN(S) AS NOTED.
- 6 REMOVE SIGN(S) AND POST AS NOTED.
- 7 INSTALL SIGN(S) AS NOTED.
- 8 INSTALL SIGN(S) AND POST AS NOTED.
- 9 INSTALL 12" THERMOPLASTIC WHITE LIMIT LINE.

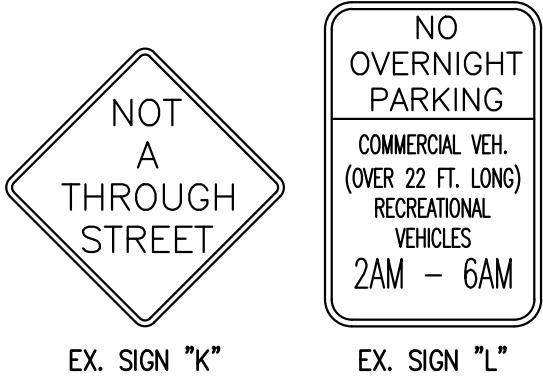

BID SCHEDULE B



REVISIONS				REFERENCES		DATE	CITY OF LOS ALAMITOS	STREET IMPROVEMENTS ON VARIOUS STREETS FY 2022-2023	SHEET 8 OF 10
NUMBER	DATE	INITIALS		APP' D					



DRAWN BY	AM,MT	6/18/2024
CHECKED BY	KS	6/18/2024
DESIGNED BY	AM,MT,YC	6/18/2024
APPROVED	6/18/2024	
City Engineer	Date	

NOEL ST
FROM KATELLA AVE TO NORTH END

OLYMPIC DR

LUNAR DR

SATELLITE DR

GLACIER CIR

VICKSBURG CIR

CARLSBAD CIR

RAINIER CIR

INTERIOR CIR

APOLLO CIR

LUNAR DR

CONSTRUCTION NOTES

- 1
- COLD MILL EXISTING PAVEMENT 1.5-INCH UNIFORM DEPTH
- 3
- CONSTRUCT 1.5-INCH THICK ARHM OVERLAY
- 5
- REMOVE EXISTING AC/AB AND CONSTRUCT 6-INCH FULL DEPTH ASPHALT CONCRETE PAVEMENT
- 7
- REMOVE AND CONSTRUCT A2-8 CURB AND GUTTER PER SPPWC STD PLAN 120-3. MATCH EXISTING.
- 8
- REMOVE AND CONSTRUCT A1-6 CURB PER SPPWC STD PLAN 120-3. MATCH EXISTING.
- 13
- REMOVE AND CONSTRUCT CURB DRAIN PER SPPWC STD PLAN 150-4
- AG
- ADJUST TO GRADE (ITEM AS NOTED)

LEGEND

- REMOVE AND CONSTRUCT 6-INCH THICK AC PAVEMENT
- COLD MILL 1.5-INCH AC PAVEMENT AND OVERLAY 1.5-INCH ARHM
- PCC IMPROVEMENTS

SIGNING AND STRIPING CONSTRUCTION NOTES:

- 1
- INSTALL STRIPING DETAIL AND/OR PAVEMENT MARKING AS SHOWN.
- 2
- REMOVE CONFLICTING STRIPING.
- 3
- INSTALL 6" DIAGONAL WHITE LINE AT 45°, 5' O.C.
- 4
- INSTALL 6" WHITE LINE AS SHOWN, UNLESS OTHERWISE NOTED.
- 5
- REMOVE SIGN(S) AS NOTED.
- 6
- REMOVE SIGN(S) AND POST AS NOTED.
- 7
- INSTALL SIGN(S) AS NOTED.
- 8
- INSTALL SIGN(S) AND POST AS NOTED.
- 9
- INSTALL 12" THERMOPLASTIC WHITE LIMIT LINE.




EX. SIGN "M"



EX. SIGN "N"

BID SCHEDULE A



REVISIONS

REFERENCES

REVISIONS			REFERENCES	
NUMBER	DATE	INITIALS	APP' D	



DRAWN BY	AM,MT	DATE	6/18/2024
CHECKED BY	KS	DATE	6/18/2024
DESIGNED BY	AM,MT,YC	DATE	6/18/2024
APPROVED	6/18/2024		
City Engineer	Date		

CITY OF LOS ALAMITOS

STREET IMPROVEMENTS ON VARIOUS STREETS FY 2022-2023		
GLACIER CIRCLE	CARLSBAD CIRCLE	RAINIER CIRCLE
FROM SOUTH END TO OLYMPIC DR	FROM WEST END TO SATELLITE DR	FROM NORTH END TO LUNAR DR
VICKSBURG CIRCLE	INTERIOR CIRCLE	APOLLO CIRCLE
FROM SOUTH END TO OLYMPIC DR	FROM NORTH END TO LUNAR DR	FROM EAST END TO LUNAR DR



LOS ALAMITOS TRAFFIC COMMISSION STATUS LOG

ITEM	DESCRIPTION	DATE INITIATED	REQUESTED BY	REMARKS
A1	install 4-way stop signs at 4-way stop intersections	Jul-15	J. Wilhelm	Completed
A2	Farquhar/Los Alamitos Alley Study		Emerson/Mejia	Completed
A3	No left turn sign by the post office on Reagan St	Jun-15	D. Patz	Completed
A4	Katella/Cherry crosswalk on eastside of Katella	Jun-15	J. Mejia	Pending - Put on 7-yr CIP
A5	High School Traffic Study		D. Hunt	Completed. Submitted request to the district and was denied. No further action at this time.
A7	Repaint arrows at bus pad on Katella @ Walnut	Apr-15	J. Mejia	Completed
A8	3-way stop sign @ Cherry St & Catalina St	Jan-13	J. Wilhelm	Completed
A9	Consider options for widening Civic Center Dr	Jan-14	J. Mejia	No longer applies
A10	Upgrade forklift crossing on Catalina	Jan-16	J. Mejia	Completed
A11	remove parking spaces on s/s Catalina opposite - near the Los Alamitos Medical Center	Mar-16	J. Mejia	Completed
A12	PT/P study to downgrade fully protected operation for Rossmoor Way/Los Alamitos TS and Bradbury/Los Alamitos TS S/B and N/B directions	Jun-16	D. Emerson	Completed
A13	1. Los Alamitos Blvd @ Farquhar - safety light out 2. Los Alamitos Blvd @ Katella - safety light cycling 3. Los Alamitos Blvd @ Florista, safety light out 4. Los Alamitos Blvd @ Cerritos - Illuminated street name dark 5. Cerritos Ave @ Los Al High, ISNS is out 6. Cerritos Ave @ Humbolt, ISNS is out 7. Cerritos Ave @ Bloomfield, safety light out	Feb-19	J. Mejia	Completed
A15	Los Alamitos Blvd @ Orangewood Safety Light Out	Mar-08	Hill	Completed
A16	Safety light out at the intersection of Humbolt Street and Cerritos Ave.	May-17	Chair Patz	Completed
A17	Bloomfield speed sign is not working	Apr-17		Completed
A18	Parking Revision 10732 Los Alamitos Boulevard in Front of McNally Back to 24 Min. Zone.	Feb. 7	Commission	Completed
A19	Real Estate Sign limiting visibility at the intersection of Florista and Pine	Apr-17	Commission	Completed
A20	Florista Signal Timing	Jul-17	Commissioner Hill	completed.
A21	Katella Avenue at Lexington Safety light is dark	Sept. 17	Commission	Completed
A22	Traffic signal indication at S/W corner missing	Sept. 17	Chair Patz	Completed
A23	Move or upgrade mid-block crosswalk on Cherry s/o Florista	Mar-16	J. Mejia & D. Patz	Completed

LOS ALAMITOS TRAFFIC COMMISSION STATUS LOG

ITEM	DESCRIPTION	DATE INITIATED	REQUESTED BY	REMARKS
A24	five (5) traffic signs on the south side of Katella Avenue, between the 605 freeway and Wallingsford are starting to lean toward the street.	Feb-19	E. Singer	Completed
A25	parkway trees are blocking the effectiveness of the street lights, on the east side of Los Alamitos Boulevard, between the car wash and Bradbury Road.	Feb-19	E. Singer	Completed
A26	alley, south of Katella from Lexington heading west: overgrown vegetation at the rear of the private properties	Feb-19	E Singer	Completed
A27	repair of two speeds bumps in the alley between Lexington Drive and Noel Street, and between Katella Avenue and Green Avenue.	Mar-19	J. Mejia	Completed
A28	request to adjust the new median lights on Los Alamitos Boulevard, so that the lights are triggered to turn on and off by the sensor and not the timer.	Feb-19	D. Patz	Completed
A29	Scramble Timing at the intersection of Cerritos and Los Alamitos Boulevard	Apr-17	R. Hill	No further action required at this time. Will be evaluated after School Traffic Study Review
A30	Add red curb for sight distance on Katella for n/bound Bloomfield	Mar-16	D. Emerson	Completed
A31	Vehicles in N/bound left turn lanes on Los Alamitos at Katella back up into thru lane	Jan-16	D. Emerson	Reviewing - Would likely require capital improvements
A32	Replace speed bumps in alley - poor condition	Jan-16	J. Mejia	Completed
A34	Extend the "merge left" sign on Los Alamitos Boulevard (NB) to be moved closer to Katella Avenue	Apr-19	Singer	Completed
A35	Painted "merging" street marks on Los Alamitos Boulevard north of Katella Avenue, south of Florista Avenue.	Jun-19	Traffic Commissioner Mejia	Completed
A36	"No Parking" sign replacement at the west end of San Joaquin Avenue	Jun-19	Traffic Commissioner Patz	Completed
A37	San Bonito Avenue street sign on Bloomfield Street going north to south is blocked by a block wall	Oct-19	Traffic Commissioner Patz	Completed
A38	Katella Deli removal of damaged wall	Feb-19	Traffic Commissioner Mejia	Completed
A39	Overgrown tree on private property covering a signal at the intersection of Bradbury Road and Los Alamitos Boulevard	Jun-19	Traffic Commissioner Rodman	Completed

LOS ALAMITOS TRAFFIC COMMISSION STATUS LOG

ITEM	DESCRIPTION	DATE INITIATED	REQUESTED BY	REMARKS
A40	Street name signs at Los Alamitos Bl/Florista-paint/vinyl peeling off	Jan-16	J. Seaman	Completed
A41	Faded permit parking signs on San Joaquin Avenue, San Mateo Avenue, and Humbolt Street paint/vinyl peeling off	Jan-22	Traffic Commissioner Patz	Completed
A42	Restripe crosswalk on Kyle Street and Florista Street	Jun-22	Javier Mejia	Completed
A43	Request for removal of flashing radar speed sign on Bloomfield Street between Cerritos Avenue and Katella Avenue	Jun-23	Chair Patz	Completed
A44	Request for median markers on the east side of Katella Avenue	Jan-23	Commissioner Murphy	Completed
COMMUNITY INITIATED ITEMS - COMPLETED				
B1	Extend signal time for cars crossing Katella @ Walnut/Wallingsford	Apr-June-15	Lindsey	Completed
B2	Conduct Four-Way Stop Study at the intersection of Walnut and Catalina	Apr-17		Completed
B3	Traffic Signal @ Wallingsford and Katella	May-17	Resident	Completed
B4	requesting the installation of a u-turn sign and/or paint a red curb in the Woodcrest neighborhood - school traffic imposes safety concerns (Los Alamitos High School)	Oct-17	Residents: Carol Wall & Betty Binder	completed.
B5	installation of a right-turn only sign at the exit driveway off Farquhar, on the east side of Jack in the Box leaving Bank of America parking lot going onto Farquhar.	Nov-17	Resident: Art DeBolt	completed and removed.
B6	Traffic signal at Katella and Los Alamitos	Jul-17	P. Dykhous	Completed: Traffic signal is operating as was intended
B7	Red curb request on north side of Sausalito Street east of the driveway into Sausalito Walk	Sep-18	Resident: Richard Murphy	Completed
B8	Installation of a crosswalk at the intersection of Green Avenue and Bloomfield Avenue	Jan-19	Resident:	Completed
B9	Dedicated right turn lane on Cerritos Avenue in front of Los Alamitos High School	Oct-19	Traffic Commissioner Hill	Completed
B10	Permit parking sign removal in New Dutch Haven neighborhood - as part of the permit parking review	Oct-19	Residents	Completed
B11	Permit parking sign removal in Carrier Row neighborhood - as part of the permit parking review	Oct-19	Residents	Completed
B12	Red curb request on south of Sausalito Street west of Los Alamitos Boulevard (next to Shenandoah's)	Sep-18	Resident: Richard Murphy	Completed

LOS ALAMITOS TRAFFIC COMMISSION STATUS LOG

ITEM	DESCRIPTION	DATE INITIATED	REQUESTED BY	REMARKS
B13	Request for the installation of equipment for the visually impaired on Florista Street and Los Alamitos Boulevard	Fall 2018	Resident	Completed
B14	Installation of speed humps at Old Town West (Project updated to Traffic Calming)	Sep-19	Resident	Completed
B15	Red Curb Request on 4021 Howard Avenue	May-17	Matthew Dastis	Item pending written request from Mr. Dastis. *Requestee passed away* No further action needed
RECOMMENDATION APPROVED & PENDING IMPLEMENTATION				
C1	Analysis of other intersections near all schools within City limits which might warrant the installation of a crosswalk	Jan-19	Traffic Commission	Approved - pending implementation
C2	Street sweeping signage around the LAMC (initiated by excess trash and debris on the street)	Jan-19	Resident	Approved - pending implementation
C3	Safety concern of accessibility on the southeast and northeast corner of Los Alamitos Boulevard/Bradbury Road and Los Alamitos Boulevard/Rossmoor Way	Apr-21	D. Hill	Approved - pending implementation
RECOMMENDATION DENIED				
D1	installation of northbound speed limit sign on Bloomfield	Nov-19	Resident: Art DeBolt	denied
D2	change the alley (between Farquhar Ave & Howard Ave) to be one-way only	Nov-19	Resident: Art DeBolt	denied
D3	Remove "Keep Clear" on Farquhar at Cherry	Mar-16	D. Emerson	Denied
D4	Remove school signs for Laurel HS, which is closed	Nov-15	D. Patz	Denied per schools request
D5	Modify pedestrian signal/sign for NB right turns - East leg Bloomfield & Katella	Jan-14	J. Wilhelm	Denied
D6	Request to add permit parking on Maple Street in the Apartment Row neighborhood	Jan-20	Resident: Mark Giruad	Denied
D7	15 minute parking sign at 4012 Katella Ave, Suite 101	Mar-20	Business Owner: Hai Nguyen	Denied - Staff spoke to Business owner
D8	Bring the traffic study for Shea Properties Arrowhead to Commission	Mar-16	J. Mejia	Denied
ITEMS PENDING - TRAFFIC COMMISSION				
E1	Striping Plan on Katella Avenue	Nov-23	J. Mejia	Item pending

LOS ALAMITOS TRAFFIC COMMISSION STATUS LOG

ITEM	DESCRIPTION	DATE INITIATED	REQUESTED BY	REMARKS
E2	Guardrail on southeast corner of Katella Avenue and Los Alamitos Boulevard	Jan-24	D. Hill	Item pending
E3	Traffic signal timing traveling east on Bradbury Road at Los Alamitos Boulevard	Mar-24	R. Hill	Item pending
E4	One Way Street with angled parking in Apartment Row on Green Avenue and Howard Avenue	24-Jun	D. Patz	Item pending
E5	Review 2-hour parking sign in front of 10841 Bloomfield Street to reserve for staff	24-Jun	R. Hill	Item pending
E6	Review time limit parking signs in the city	24-Jun	J. Mejia	Item pending
E7	No U-Turn sign on the left turn lane on Los Alamitos Boulevard into Good Shepherd Church	24-Jun	R. Hill	Item pending
E8	E-Bike Plan	24-Jun	B. Murphy	Item pending
ITEMS PENDING CONSIDERATION - CITY COUNCIL				